



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016-12-21	Spring Liu	Change Rev.01 To Rev.A

ALTW
CONFIDENTIAL
 2016-12-21
 R&D DEPT.

ALTW
 DCC. DEPT.
 CONFIDENTIAL
 2017.01.18
 ISSUED




Conn.

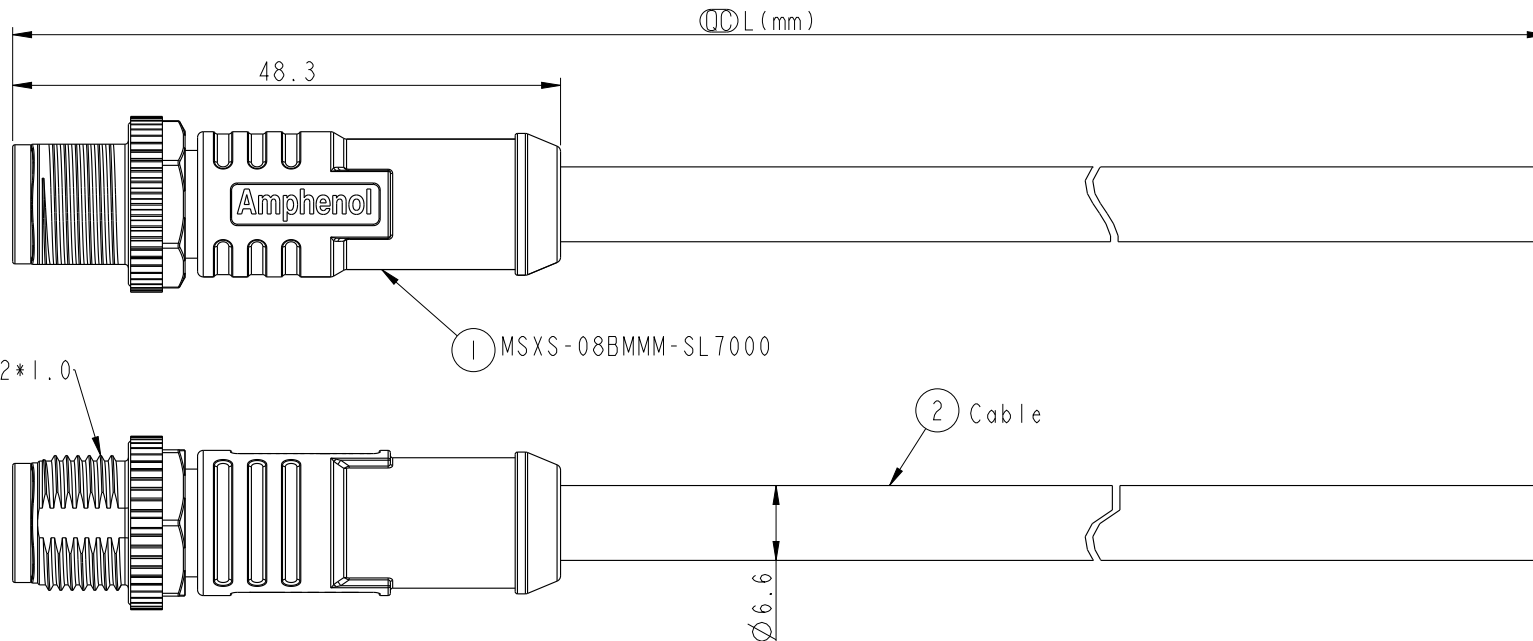

① MSXS-08BMMM-SL7000

② Cable

∅6.6



Pin Assignment
Front View

Braid	Shield	
8	Blue	藍
7	White / Blue	白/藍
6	Brown	棕
5	White / Brown	白/棕
4	Green	綠
3	White / Green	白/綠
2	Orange	橙
1	White / Orange	白/橙
Conn.	Wire Color	Pin Out

MSXS-08BMMM-SL7XXX


↑
 XX :01~99Meters
 01 :01Meter
 02 :02Meters
 :
 :
 99 :99Meters

Cable Length(L):01~99Meters

Note:

- * Ⓞ Important Dimensions To Check.
- * Waterproof Rate: IP67
- * Connector: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Screw Nut: Zinc Alloy, Nickel Plated
- * Shield: Copper Alloy
- * Outer Mold: PU, Black
- * Cable: Cat6A, 26AWG*4P+B, LSZH, UV resistant
OD 6.6mm, Green Jacket.
- * Rated Voltage: 50 V AC, 60 V DC
- * Rated Current: 0.5A
- * Cable length Tolerance: 01M: ±40mm
02M~05M±60mm
06M~10M±100mm
11M~30M±200mm
31M~99M±500mm

UNIT:mm



TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE M12 X-code 8Pin Male Shielded Cable Connector			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.3	Ⓞ: Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Spring Liu	DATE 2016-12-21
DWG NO. MSXS-08BMMM-SL7XXX	CHECKED BY Fisher Wang	DATE 2016-12-21
CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2016-12-21

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.