



THE R M O M E T R I C S
A COMMITMENT TO EXCELLENCE

ZTP-188MA

Thermometrics IR Module



The ZTP-188MA 1 x 8 IR module is used for non-contact surface temperature monitoring. This thermopile IR module presents the temperature compensated 8 linear array outputs via I²C with optics (Silicon Lens). It can also provide compatibility with the customer's device without the need for recalibration. The ZTP-188MA uses 4-wire connections: two signals for I²C output, single power supply and ground. The sensor is fully calibrated with a wide object and ambient temperature range. Lens for different field of views are available on request.

Applications

- Air conditioners
- Human body temperature detection

Features

- Digital temperature output
- I²C communication protocol
- Fully calibrated and compensated
- 1 x 8 array module
- Compact size and large detection range
- Low power consumption
- Multi-zone detection

Amphenol
Advanced Sensors

Specifications

Parameter	Min	Typ	Max	Unit
Supply Voltage	4.75	5.00	5.25	V
Supply Current		4.5		mA
Temperature Range	0		40	°C
Operating Temperature	0		70	°C
Storage Temperature	-20		100	°C
Resolution		0.1		°C
Output Type		Digital I ² C		
Baud Rate		100		Kbit/sec
Address length		7		Bit
Address		0x58		-
Input/Output High level	0.7 VDD			V
Input/Output Low level		0.3 VDD		V

Total FOV

50 degree


Pixel FOV

7 degree

PCB Size

23 mm X 30 mm

Temperature Accuracy

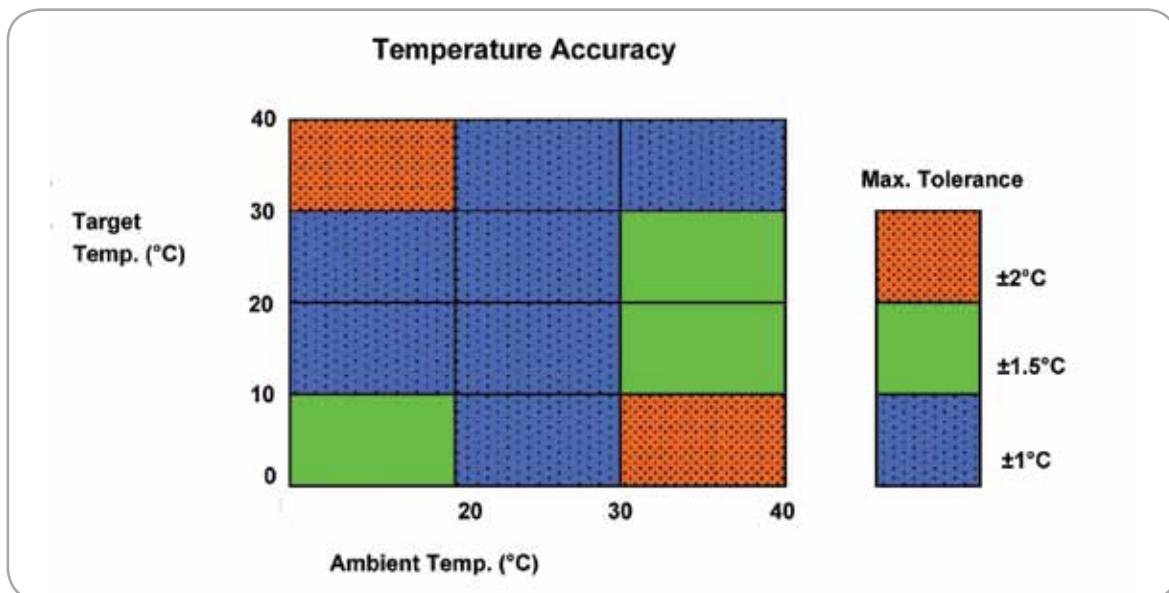


Output Format

I²C Command

Sensor	I ² C Address	Command	Descriptions
ZTP-188MA	0x58	0xA1	Read Target Temperature
		0xB1	Read Sensor Temperature

Temperature Calculation

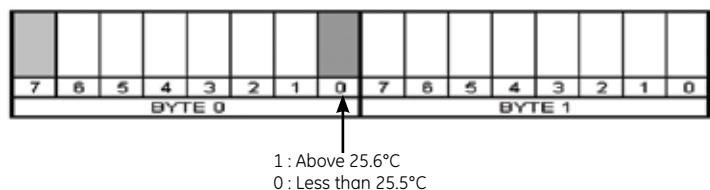

Examples of Temperature Calculation

Case-1 : 0°C ~ 25.5°C

- Send value : 0x58, 0xA1
- Return value : Byte(0) : 0x00, Byte(1) : 0xC8


$$\begin{aligned} \text{Output temperature} &= (256 * \text{Byte}(0) + \text{Byte}(1)) / 10 \\ &= (256 * 0 + 200) / 10 \\ &= 20.0 \end{aligned}$$

Case-2 : above 25.6°C


- Send value : 0x58, 0xA1
- Return value : Byte(0) : 0x01, Byte(1) : 0x96

$$\begin{aligned} \text{Output temperature} &= (256 * \text{Byte}(0) + \text{Byte}(1)) / 10 \\ &= (256 * 1 + 150) / 10 \\ &= 40.6 \end{aligned}$$

Field of View of Sensor Module

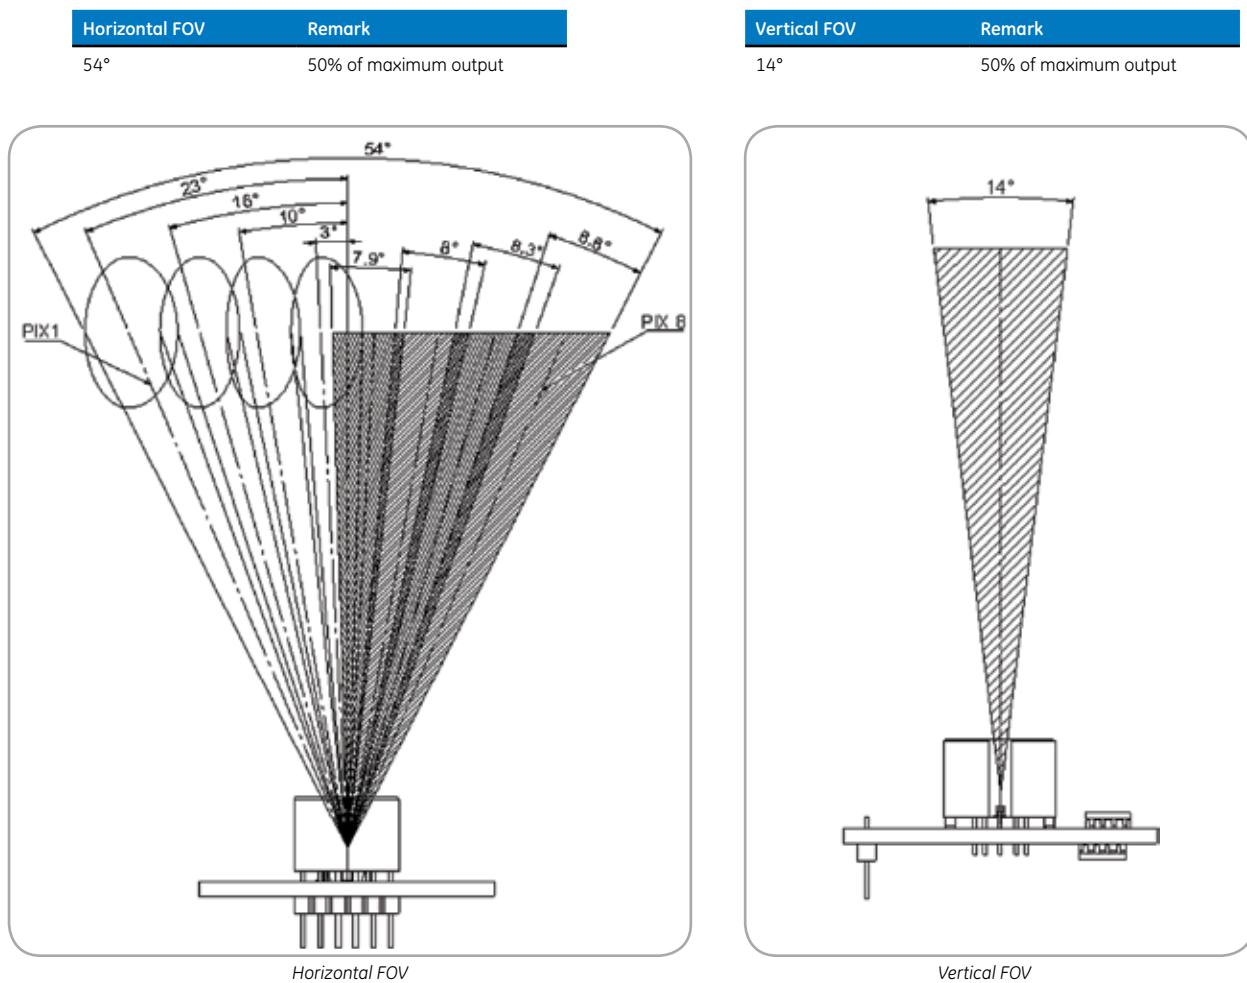

Package Dimension

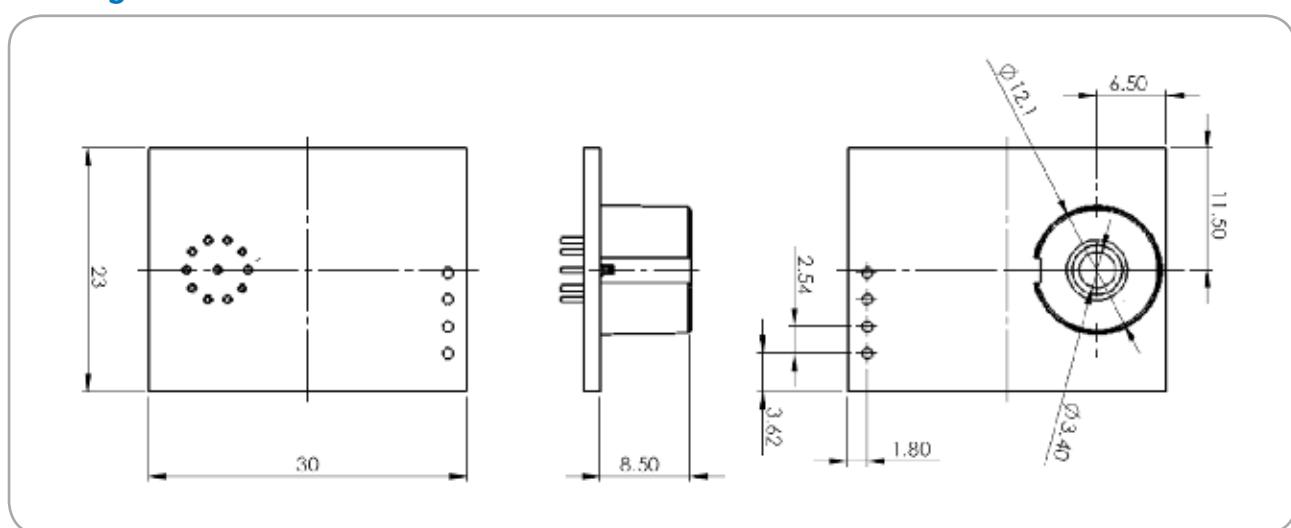

Amphenol

Advanced Sensors

www.amphenol-sensors.com

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice.
Other company names and product names used in this document are the registered trademarks or
trademarks of their respective owners.