





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1590369~72	2015/09/11	Ruru	Change Logo & Note

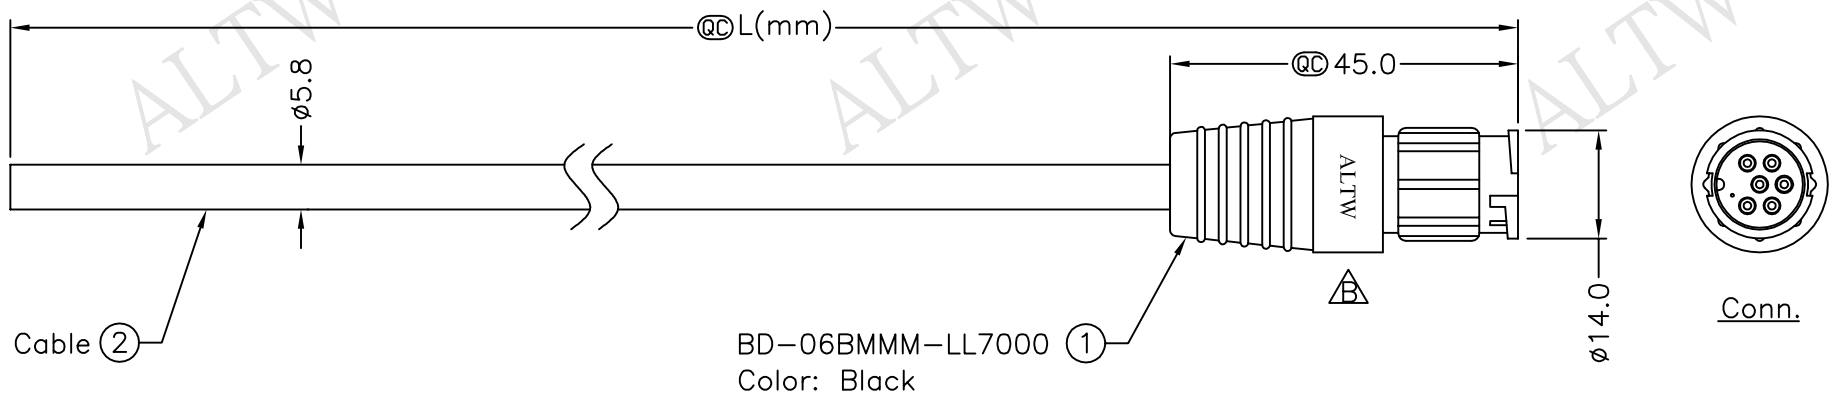

BD-06BMMM-LL7AXX

XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters

Cable Length(L):01~99

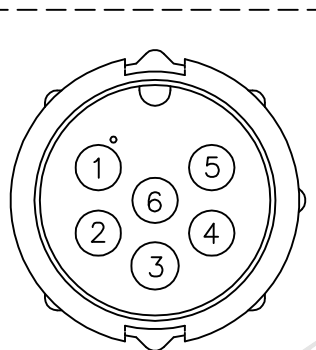

Pin Assignments  
Front View

6	White
5	Red
4	Orange
3	Yellow
2	Green
1	Blue
Conn.	Wire Color
Pin Out	

- Note:
- \* @C Important Dimension To Check.
  - \* Waterproof Rate: IP67
  - \* Connector: Nylon+GF, Black
  - \* Pin: Copper Alloy, Gold Plated
  - \* Cable: UL2464 24AWG\*6C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8, Black
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm

UNIT:mm		TITLE	Standard, Cable Lock 6Pin M Conn M Pin		ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	SCALE	Free	SHEET 1 OF 1	DWG NO	CHECKED BY	DATE
		REV.	B	SIZE A4	CUSTOMER	APPROVED BY	DATE
				@C :Inspection Item			
Amphenol LTW			安費諾亮泰企業股份有限公司		BD-06BMMM-LL7AXX	Ruru	2015/09/11
					ALTW	Rita	2015/09/11
						Lion	2015/09/11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.