
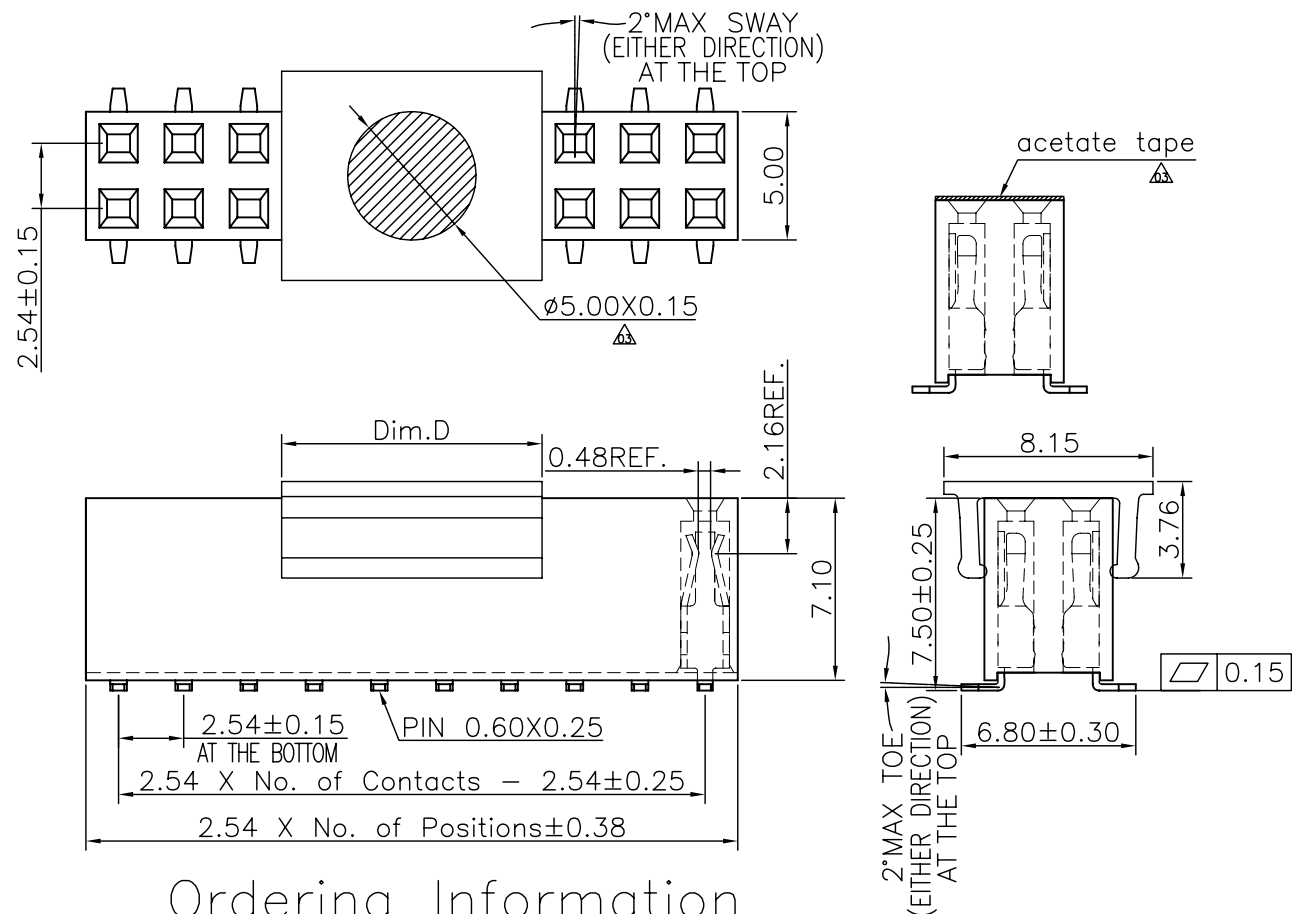


| REV. | LOCAS. | DESCRIPTION | DATE       | DRAWN |
|------|--------|-------------|------------|-------|
| 03   | ▲      | 依上級要求變更膠紙配方 | 2013.01.21 | 李芳忠   |
| 04   | ▲      | 依上級要求變更產品說明 | 2014.04.24 | 李芳忠   |

Specifications  
 Current Rating:3Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free) ▲ or the equivalent material  
 All materials must meet Greenconn hazardous substances control standards.  
 Mating Data  
 Mates with 0.64mm square pins. Top entry mating length=2.70 to 6.80mm. Bottom entry mating length=7.50 to 8.20mm.

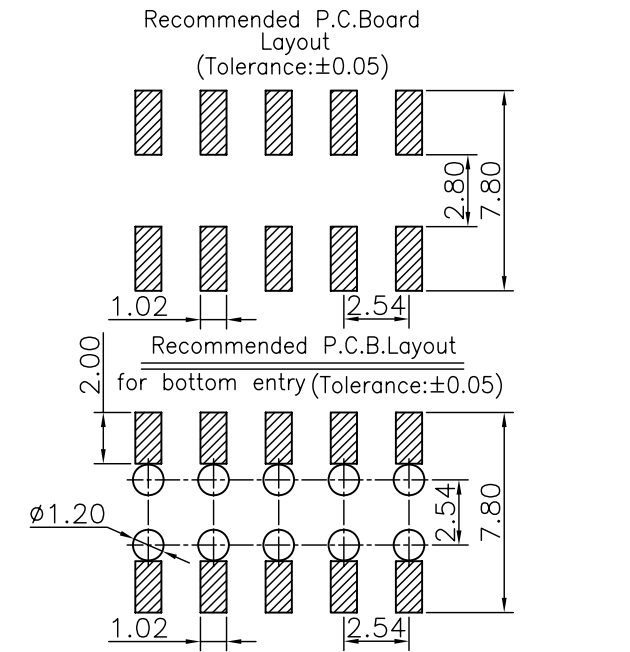

### Ordering Information

C SHC221 - XX XX A 001 R 1 A X

No. of Pins per Row 02~40  
 Standard Plating 02=Gold Flash  
 Selective Plating 01=Tin 05=Gold Flash/Tin  
 Color 1=Black  
 Standard Packing C=Tube  
 Selective Packing A=Box E=Cap+Tube F=Cap+Tape&Reel G=Acetate Tape+Tube H=Acetate Tape+Tape&Reel

| Dim.D   | NOTE      |
|---------|-----------|
| 4.00mm  | 02~07pins |
| 10.15mm | 08~40pins |

A

格菱股份有限公司  
**Greenconn Corporation**

| GENERAL TOLERANCE |           |
|-------------------|-----------|
| X.*±5.0°          | X.±0.30   |
| .X*±3.0°          | .X±0.25   |
| .XX*±2.0°         | .XX±0.15  |
| .XXX*±1.0°        | .XXX±0.10 |

DESIGN: 李芳忠  
 CHECKED:  
 CO SIGNED: 劉北平  
 APPROVED:

DATE: 2014.04.24  
 DATE:  
 DATE: 2014.04.24  
 DATE:

DWG. NO. ▲  
 CSHC221-CA1RA  
 PART NO.  
 CSHC221-XXXX A001R1AX

TITLE.  
 2.54 FEMALE HEADER  
 DUAL ROWS SMT TYPE  
 CONNECTOR

F

E

D

C

B

A