


REV	DESCRIPTION	DATE
-----	-------------	------

- NOTE :
1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	22	20	18	16
AMP.	3	4	7	10
  2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
  3. INSULATION MATERIAL : NYLON
  4. INSULATION COLOR : RED
  5. TERMINAL MATERIAL : BRASS
  6. WIRE RANGE : 22-16 A.W.G. ( 0.5-1.5 mm<sup>2</sup> )
  7. NEMA TAB : 0.020 \* 0.110 ( 0.5 \* 2.8 )
  8. DOUBLE CRIMP : WITH SHORT COPPER SLEEVE ON BARREL
  9. TERMINAL SURFACE TREATMENT : TIN PLATED
  10. TERMINAL THICKNESS : 0.30 mm

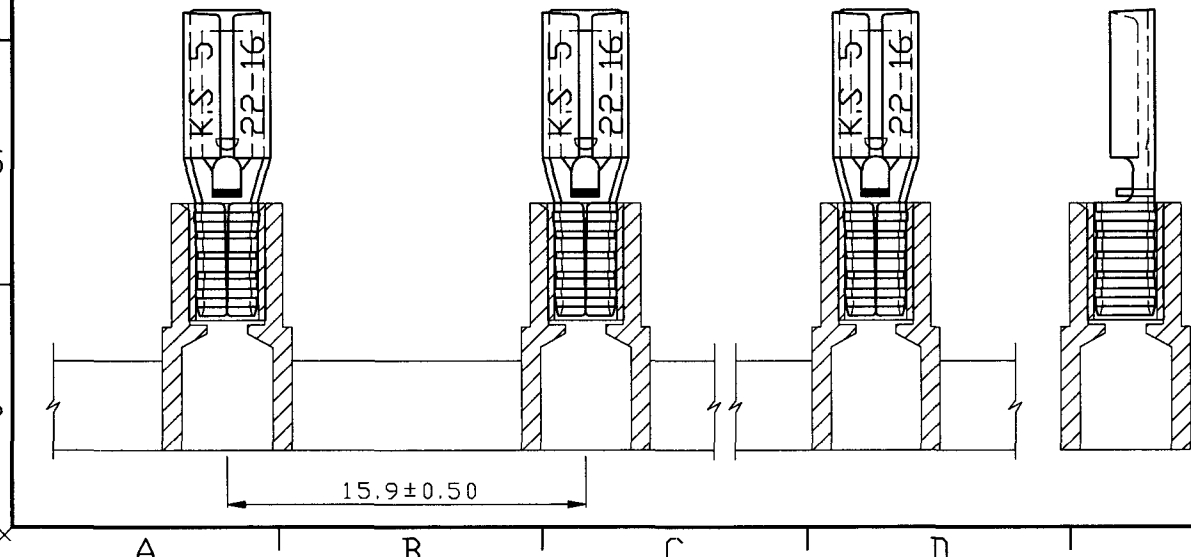

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	PLASTIC STRIP ON REEL TYPE (NYLON-INSULATED PS SERIES)	UNIT	APPROVE
PART NO.	FDNYDX1-110(5)-PS	MATERIAL	-----
NUMBER	KA-96248-C	SCALE	SHEET PAGE
DATE	2007/02/12	3/1	1-0 10F1
		CHECKED	DRAWN

**KST. K.S. TERMINALS INC.**