FILE: 2016-D02\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE

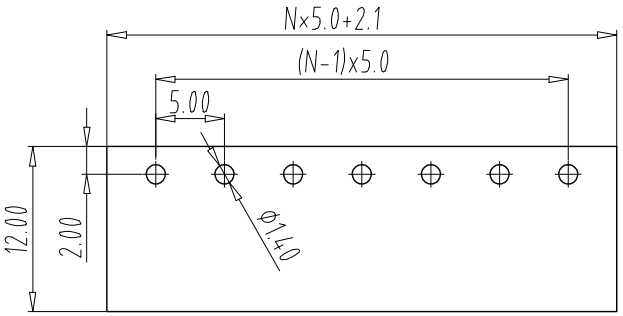

PCB Layout

NOTES:

1. Rating: <UL> 300V/16A
   <IEC> 320V/20A
2. Poles:02-24P
3. Insulation Withstands Voltage: AC2000V/1 Min
4. Contact resistance: 20mΩ
5. Insulation Resistance: 500MΩ at DC500V
6. Using Temperature Range: -40°C/+115°C
7. Max soldering : +250° for 5S
8. RoHS Compliance.
9. With" ★ "is important dimension

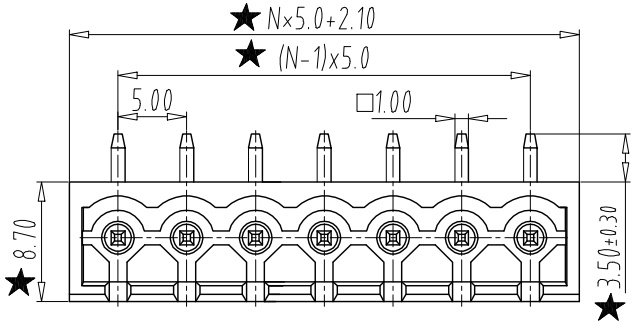

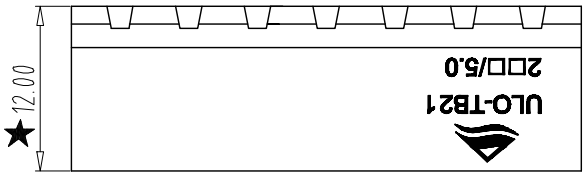



How to order

ULO-TB21 - 2RC/5.0 - □ □ P -Y 0 0 0A

- ULO-TB21: Certificate Series NO.
- 2RC/5.0: Factory Code
- □ □ P: poles
- -Y: color:
  - 1:Grey
  - 2:Blue
  - 3:Black
  - 4:Green
  - 5:Orange
  - 6:Red
  - 7:transparent
  - 8:Yellow
  - 9:White
- 0 0 0A: Customer requirements (standard)

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		÷	—	//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

1	Solder Pin		3140000018/19	N	Brass		Sn Plated
1	HOUSING		4030001238	1	PA66		UL94V-0
ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE
DWG.		DATE	18.10.17	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.	史文莉	DATE		NAME	ULO-TB21-2RC/5.0-XXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	ULOTB21Y000A		