

REV	ECN NO.	CONTENT	CHK	DATE
V0.0		初版	ZCP	





NOTES:

- Rating: <UL> 300V/16A  
<IEC> 320V/20A
- Poles: 02-24P
- Insulation Withstands Voltage: AC2000V/1 Min
- Screw Torque Value: 0.4Nm
- Insulation Resistance: 500M  $\Omega$  at DC500V
- Using Temperature Range: -40°C/+115°C
- Suitable Electric Wire: 12-28AWG(UL) 2.5mm<sup>2</sup>(IEC)
- Strip length: 7-8mm
- ROHS compliance
10. With' ★ "is import dimension

How to order  
**UL0-TB23 - 2KB/5.0 - XXP - Y 0 0 0A**

Certificate Factory poles color: Customer requirements  
 Series NO. Code

- 1: Grey
- 2: Blue
- 3: Black
- 4: Green
- 5: Orange
- 6: Red
- 7: transparent
- 8: Yellow
- 9: White

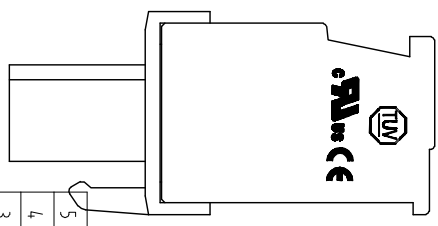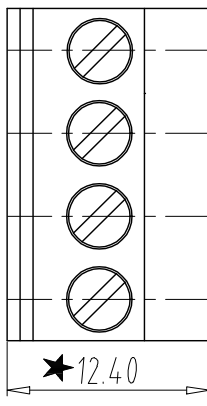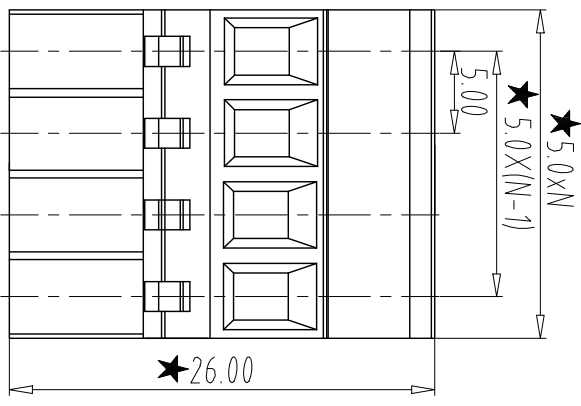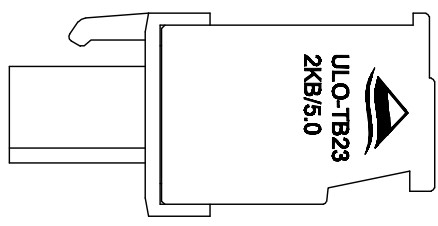

Total Pitch Tolerances		Nominal dimension range	
in	mm	in	mm
over	0	over	0
to	30	to	30
to	53	to	53
to	70	to	70
to	90	to	90
to	115	to	115
to	150	to	150
to	200	to	200
to	250	to	250
to	320	to	320
to	30	to	30
to	53	to	53
to	70	to	70
to	90	to	90
to	115	to	115
to	150	to	150
to	200	to	200
to	250	to	250
to	320	to	320
to	10	to	10
to	100	to	100
to	150	to	150

5	SCREW	3160000019	XX	STEEL	M2.5/Zn Plated
4	Clamp	3130000004	XX	Phosphor Bronze	Tin Plated
3	BLOCK	3090000001/3	XX	Brass	Ni Plated
2	Cover	4020002566	1	PA66	UL94V-0
1	Housing	4020001099	1	PA66	UL94V-0
ITEM	NAME OF PART	NO OF PART	Q-TY	MATERIAL	NOTE
DWG.	DATE	18.10.17	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	A4
APP.	DATE		NAME	UL0-TB23-2KB/5.0-XXP-Y000A	
NINGBO UL0 ELECTRONICS CO., LTD. 宁波欧警电子有限公司 DWGNO: UL0TB23Y000A					