

A

B

C

D




E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		NEW RELEASE		2018.01.17

1

1

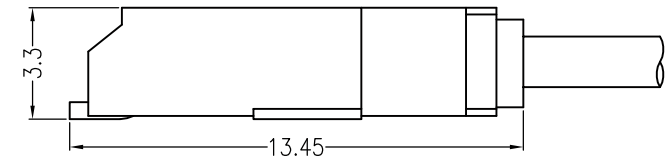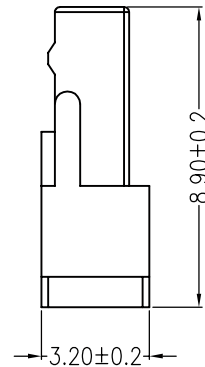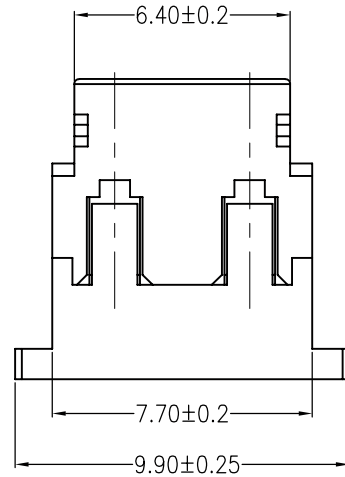

Assembly Layout

Main Specifications

Poles : 02 to 05

Contact resistance : $\leq 20\text{m}\Omega$

Insulation resistance : $\geq 1000\text{M}\Omega$

Rated voltage : 600V AC DC

Rated current : 1A AC DC

Withstand voltage : 1800V AC/minute

Temperature Range : -25°C --- $+85^{\circ}\text{C}$

2



2

3

3

4

4

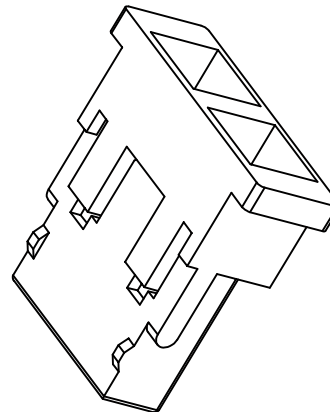

5

5

A

B

C

D

E

F

C					
B					
A	HOUSING		1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
LEDsconn					TITLE: A4001Y 4.00mm PITCH HOUSING
X. ± 0.5	X. $\pm 5^{\circ}$	USE: CUSTOMER		PART NO.:	
.X ± 0.3	.X $\pm 2^{\circ}$	APPD:		DWG NO.:	
.XX ± 0.25	.XX $\pm 1^{\circ}$	CHKD:		SCALE	
--	--	DR:		1 : 1	SHEET
		UNITS: mm			1 / 1