FILE: 2016-D02\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE
V0.0		初做成	ZCP	

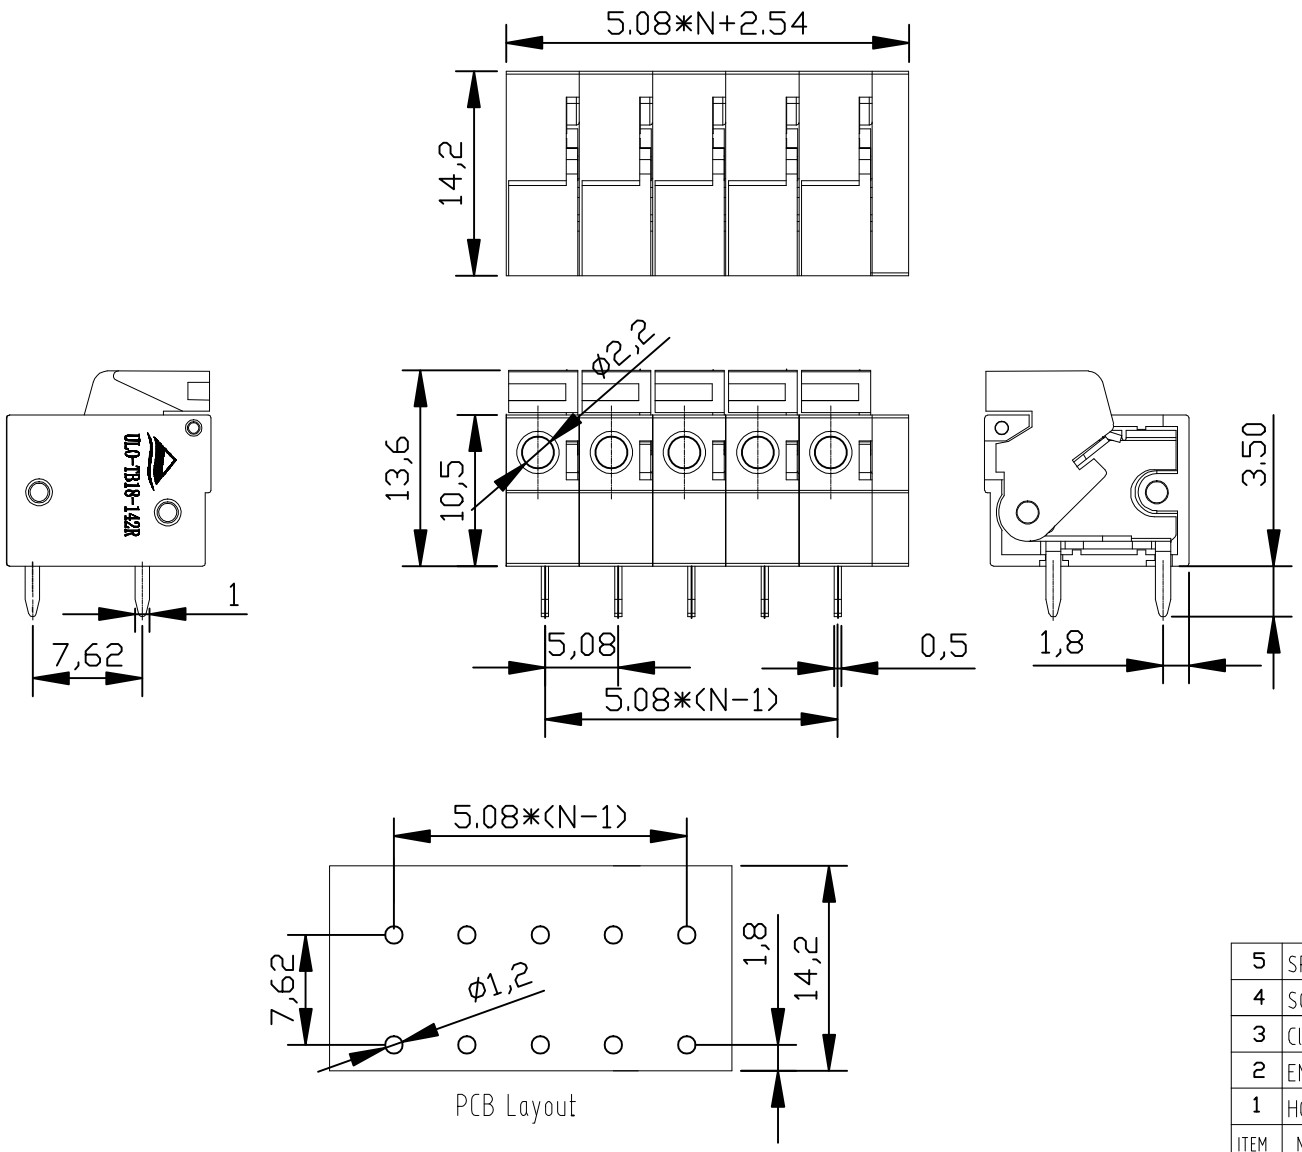

PCB Layout

NOTES:

1. Rating: <UL> 300V/10A
   <IEC> 320V/15A
2. Poles:02-24P
3. Insulation Withstands Voltage: AC2000V/1 Min
4. Insulation Resistance: 500MΩ at DC500V
5. Using Temperature Range: -40°C/+115°C
6. Suitable Electric Wire:16-22AWG(UL),0.2-1.5mm²(IEC);
7. Max soldering : +250° for 5S
8. RoHS Compliance.
9. With" ★ "is important dimension

How to order

ULO-TB18 - 142R/7.62 - XXP - Y 0 0 0A

- ULO-TB18: Certificate Series NO.
- 142R/7.62: Factory Code
- XXP: poles
- Y: color:
  1:Grey
  2:Blue
  3:Black
  4:Green
  5:Orange
  6:Red
  7:transparent
  8:Yellow
  9:White
- 0 0 0A: Customer requirements

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
5	SPRING COIL	3150000014	N	STAINLESS	
4	SOLDER PIN	3110000032	N	BRASS	Sn Plated
3	Clapboard	4040000310	N-1	PA66	UL94V-0
2	END COVER	4010000065	1	PA66	UL94V-0
1	HOUSING	4010000102	N	PA66	UL94V-0

DWG.		DATE 18.10.18	UNITS	MM	SHEET/OF 1/1
CHK.			SCALE	1 : 1	A4
APP.	史文清		NAME	ULO-TB18-142R/5.08-XXP-Y000A	
	NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司		DWGNO.	ULOTB18Y000A	

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		÷	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5