



SPECIFICATION		
1	Model No.	CFG03-E
2	Rated Voltage	3VDC
3	Operating Voltage	3.0~8.0VDC
4	*Current Consumption	≤30(mA)
5	*Sound Output at 10cm	≥80(dB)
6	Resonant Frequency	2300±300(Hz)
7	Operating Temperature	-20~+70(°C)
8	Storage Temperature	-30~+80(°C)
9	Weight	1.8 (g)
10	Case material	PPO

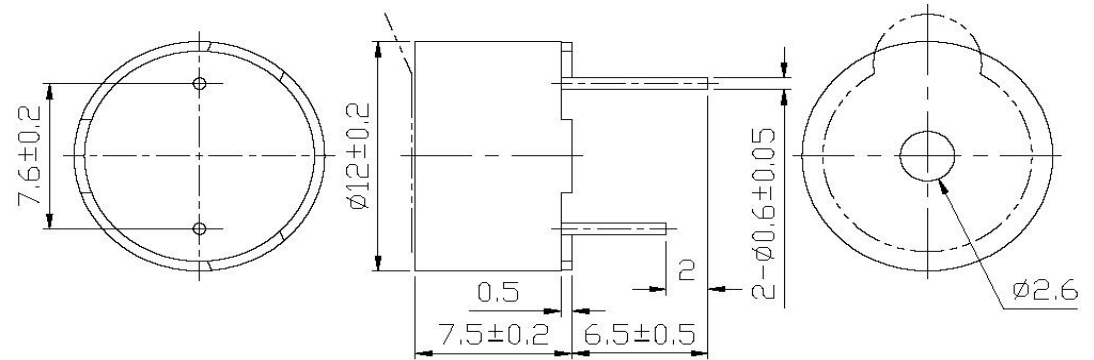


REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

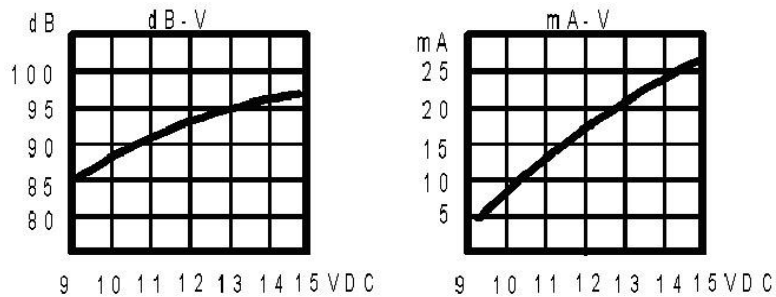

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS
2. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
3. THIS PART IS ROHS COMPLIANT
4. OTHER NOTICE

UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE +/-0.5 AND ANGLES ARE +/-3°	SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawn date
								
	A4							
	CFG03-E	SMD BUZZER	Edition	Sheet 1 / 1				