





SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C


Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

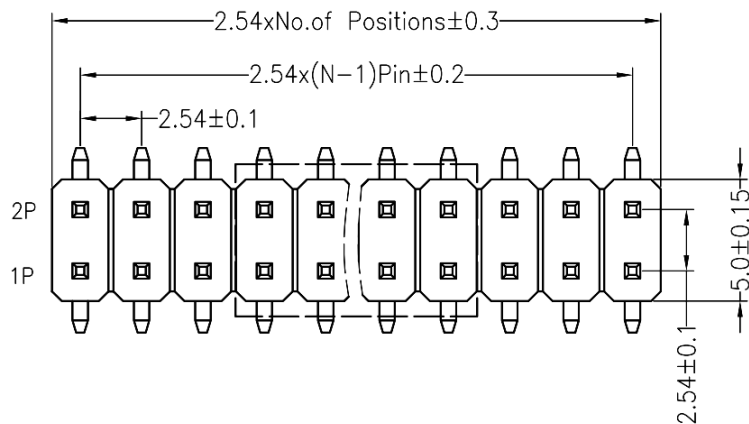

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

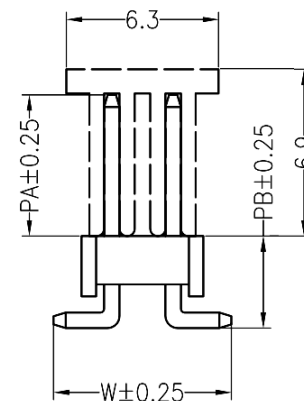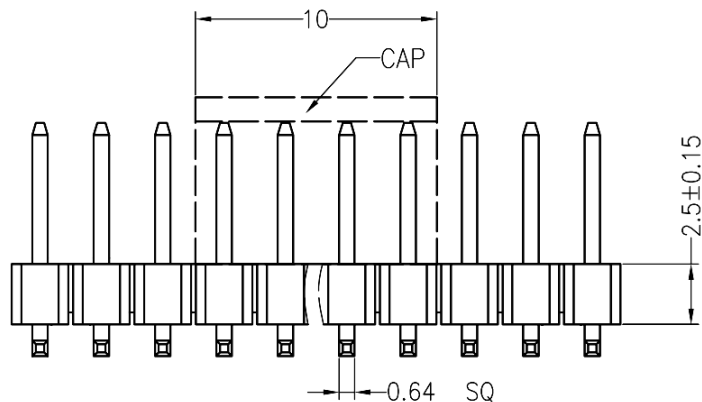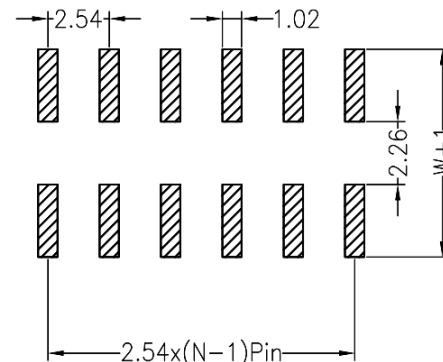

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	6.00	3.20	7.50	11.0
Alternate				

				OPERATION		DRAW		SCALE	FIT	CONNTHERM		
				X.X	±0.30			UNIT	mm			
				CHECK				SIZE	A4	PART NO.		PLTDxxS-JL
				APPROVE				SHEET	1/1	TITLE:		2.54PH 2xNpin H2.5mm SMT
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIM	TOL	PROJ.					
1		2		3	4	5	6	7		8	9	