




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2010.11.30	王元運

Specifications  
 Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500VAC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Brass  
 Insulator Material: PBT+ Glass Fiber  
 UL 94V-0  
 All materials must meet Greenconn  
 requirement for environment protection.

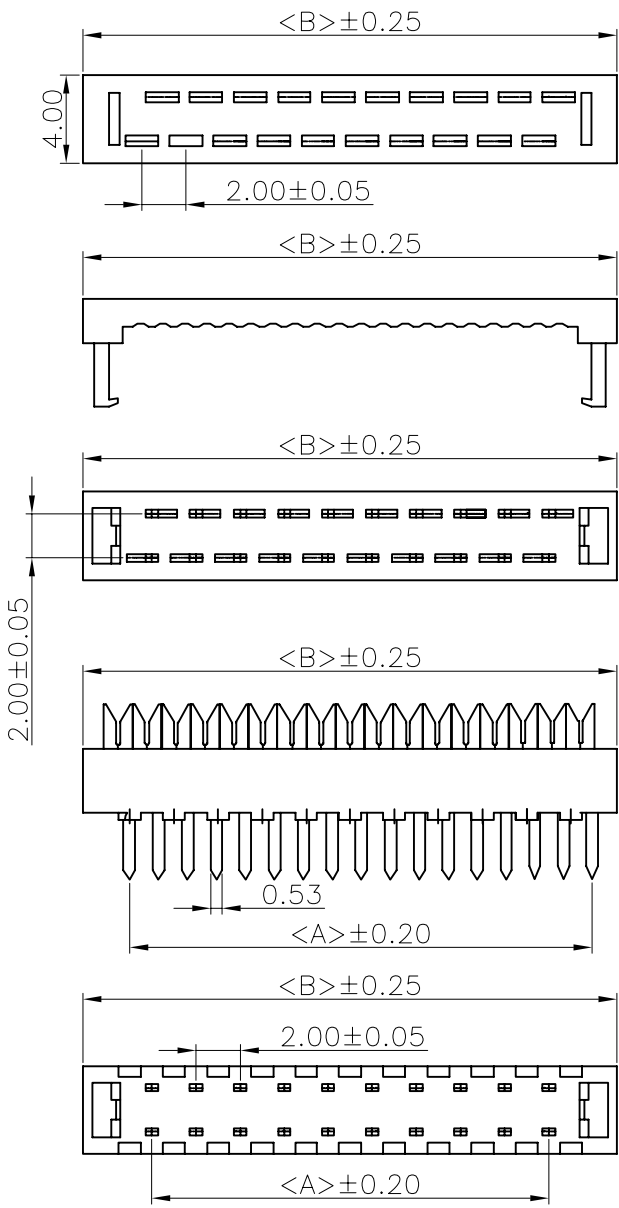

### Ordering Information

GQFA202 - XX XX A001 A 1 B X-23

No. of Pins per Row See the table  
 Standard Plating 05=Gold Flash /Tin  
 Standard B=Tray

No. of PIN/ROW	Dimension Information	
	A	B
05	8.00	14.20
07	12.00	18.20
08	14.00	20.20
09	16.00	22.20
10	18.00	24.20
12	22.20	28.20
13	24.00	30.20
14	26.00	32.20
15	28.00	34.20
17	32.00	38.20
20	38.20	44.20
22	42.00	48.20
25	48.00	54.20

格稜股份有限公司  
 Greenconn Corporation

REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1	
---------	----------	------------	-----------	--

<b>GENERAL TOLERANCE</b>		DESIGN: 王元運	DATE: 2010.11.30	DWG. NO. GQFA202-CA1AB	Pitch 2.0 FD
X* ± 1.5°	X. ± 0.30	CHECKED: 李新華	DATE: 2010.11.30	PART NO. GQFA202-XXXXA001A1BX-23	
.X* ± 1.0°	.X ± 0.20	AUDITED: Lear	DATE: 2010.11.30		
.XX* ± 0.5°	.XX ± 0.15				
.XXX* ± 0.3°	.XXX ± 0.10				