
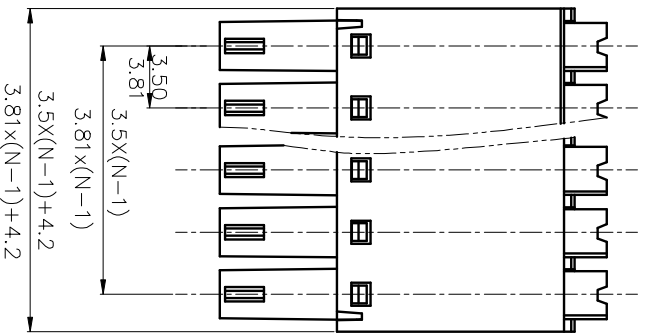
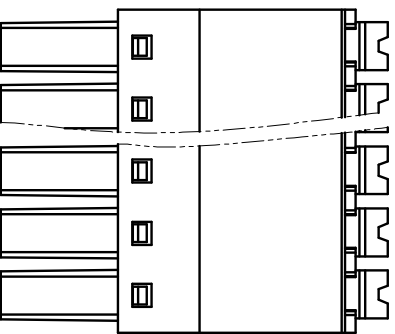
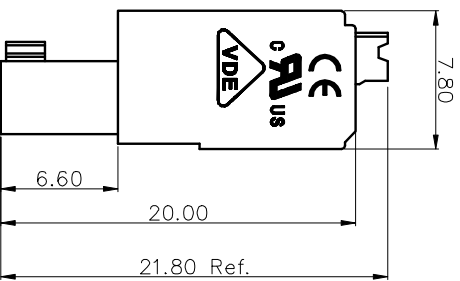
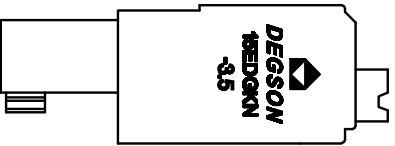


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE



15EDGKN - 3.5/3.81 - XXP - 1Y - 1000A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

NOTES1:

- UL Standard
- 1. Rated Voltage/Current : 300V / 8A
- 2. Withstanding Voltage : AC1600V/1Min.
- 3. Wire Range : 28~16AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.50/3.81mm, Poles : N=2-22P
- 3. Stripping length : 10mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned Tolerances:

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	2.5kV
Rate Voltage(V)	250V
Rate Current(A)	8A

2. Wire Range : 0.2~1.0mm²

Pitch range in mm	Over	TO	Over	TO	Over	TO	Over	TO	Over	TO	Over	TO	Over	TO	Over	TO
6	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
10	24	30	30	60	60	100	100	150	150	150	150	150	150	150	150	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.50	±0.70	±1.00	±1.30	±1.30	±1.30	±1.30	±1.30	±1.30	±1.30	±1.30	±1.30

6. RoHS Compliance

PART NO.:		NAME:	
/		DEGSON 宁波德森电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SCALE	1:1