
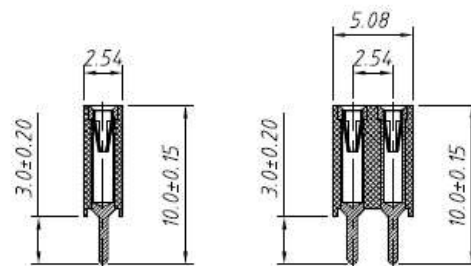
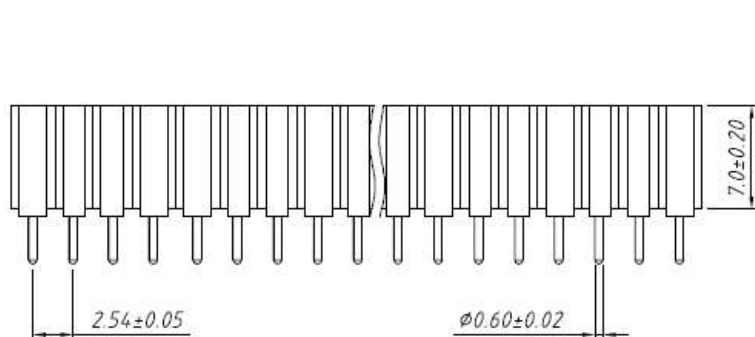


Material:
 Housing: 30% Glass filled PPS UL94V-0
 Contacts: Beryllium copper or Phosphor Bronze
 Plating: Gold 1.25u" over 50u" nickel

Electrical Characteristics:
 Current Rating: 3.0 AMP
 Insulator Resistance: 1000M Ω min. at DC 100V
 Contact Resistance: 10m Ω max.
 Operating Temperature: -40°C ~ +105°C

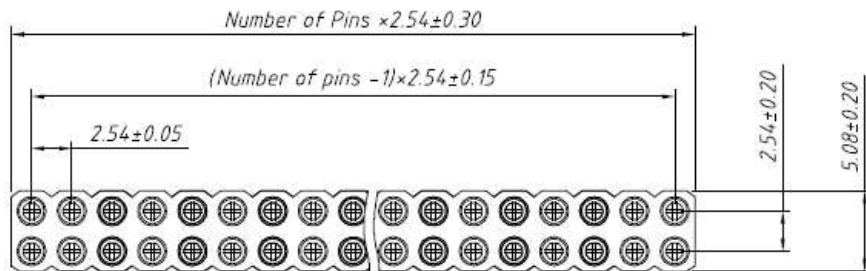

GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.50	UNITS	mm	2.54mm Pitch SIP Socket Connector
X ± 0.25	SCALE	1:1	
.XX ± 0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		CONNTERM
X. $\pm 5^\circ$	Date	2018-03-01	
X $\pm 3^\circ$	SHEET	1 OF 1	
.XX $\pm 2^\circ$			