

D 1708



17x17x8mm(0.66"x0.66"x0.31")




HOUSING	Thermoplastic PBT+30% Fiber Glass, UL94V-0
IMPELLER	Thermoplastic PBT+30% Fiber Glass, UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	2.3 g
ROHS COMPLIANCE	Yes
APPLICATION	For pico projector, MID, UMPC, smartbook, CCTV Portable GPS, air delivery of portable gas/particular detector, or to defrosting and ventilating of Mask/Goggle/Helmet
IP LEVEL	IP57 included (Special IP Rating On Request)

17 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D1708V3HS	3.3	0.055	0.181	12000	0.135	3.42	0.67	0.018	15
D1708V5HS	5	0.085	0.425	16000	0.27	6.86	0.95	0.026	18

DIMENSION

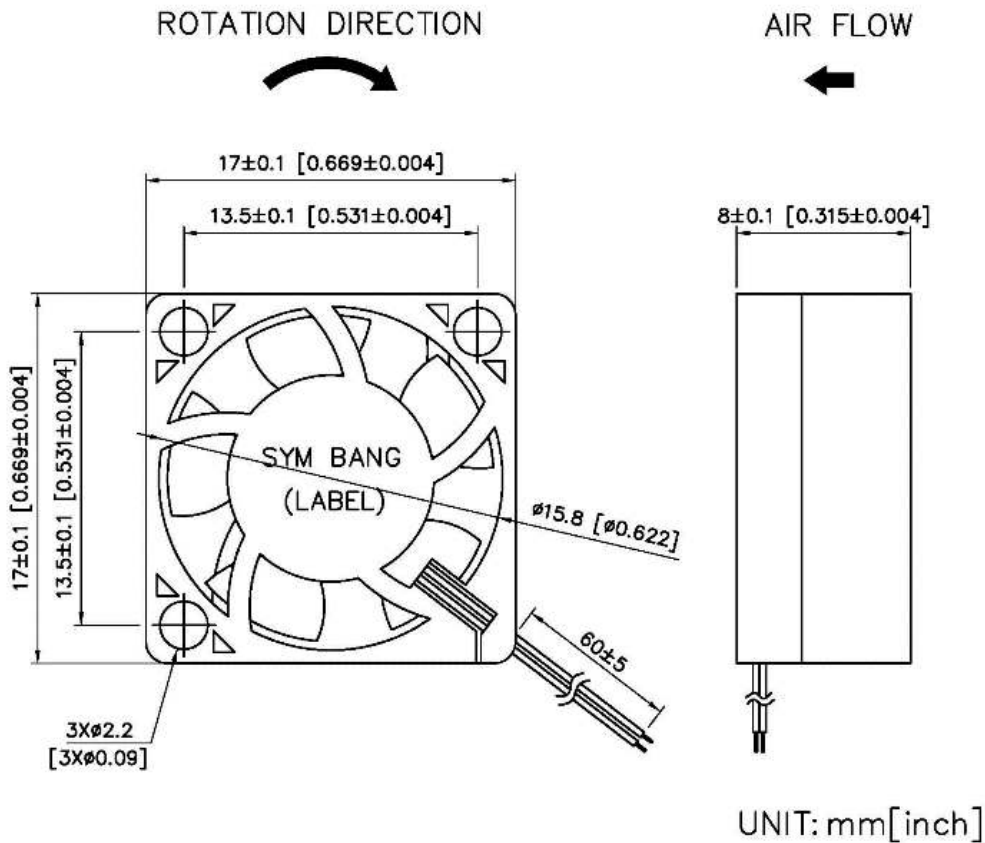

AIR PERFORMANCE

