
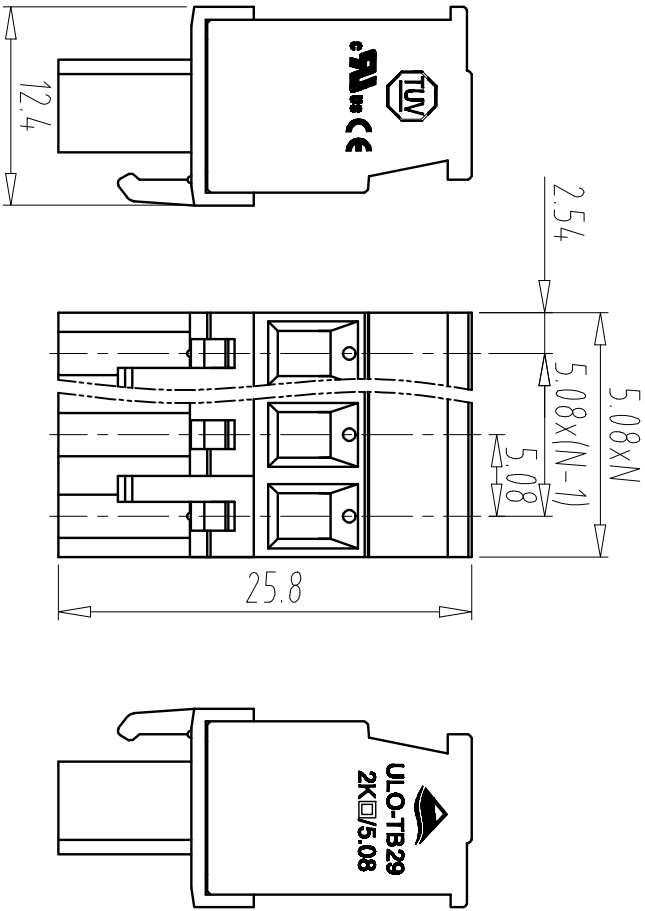


FILE: 2021-D01VUL0

REV	ECN NO.	CONTENT	CHK	DATE



- NOTES:
- UL Standard
- Use group: B, C, D
Rated Current: 15A, 10A
Rated Voltage: 300V, 300V
 - Wire range: 12~28AWG
- IEC Standard
- -

Insulation Degree	2
Overvoltage category	B
Rated impulse voltage(kV)	4.0kV
Rated Voltage(U)	320V
Rated Current(A)	15A

- 2 wire range: 1.0-2.5mm²
 3. Torque value: M3, 0.5Nm
- NOTES2:
- Housing: PA66(UL94V-0)
 - Block: Brass(Ni Plated)
 - Clamp: Phosphor Bronze(Tin Plated)
 - Screw: Steel(M2.5, Zn Plated)
 - Cover: PA66(UL94V-0)

- NOTES3:
- Pitch: 5.0mm Poles: 02-24P
 - Stripping length: 7mm
 - Operating temperature: -40℃~+105℃
 - RoHS Compliance
- How to order
- UL0-TB29 - 2KA/5.08 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

Total Pitch Tolerances		Nominal dimension range	
In mm		In mm	
over	0	over	0
to	30	to	30
over	53	to	53
to	70	to	70
over	90	to	90
to	115	to	115
over	150	to	150
to	200	to	200
over	250	to	250
to	320	to	320
over	30	to	30
to	53	to	53
over	70	to	70
to	90	to	90
over	115	to	115
to	150	to	150
over	200	to	200
to	250	to	250
over	320	to	320
to	10	to	10
over	100	to	100
to	150	to	150
over	0.2	to	0.2
to	0.3	to	0.3
over	0.2	to	0.2
to	0.3	to	0.3
over	0.5	to	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	21.04.27	UNITS	MM	SHEET/OF 1/1
CHK	DATE		SCALE	1:1	A4
APP	DATE		NAME	UL0-TB29-2KA/5.08-XXP-Y000A	