

# D

# 22580M-DA

225x225x80mm(8.77"x8.77"x3.12")



HOUSING	Aluminum Die Casting
IMPELLER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M $\Omega$ min. @500 VDC
WEIGHT	2.53 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP54 (Special IP Rating On Request)


# 225

 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D22580V24HBM-DA	24	2.2	52.8	2800	0.71	18	580	16.41	67
D22580V48HBM-DA	48	1.1	52.8	2800	0.71	18	580	16.41	67

## DIMENSION

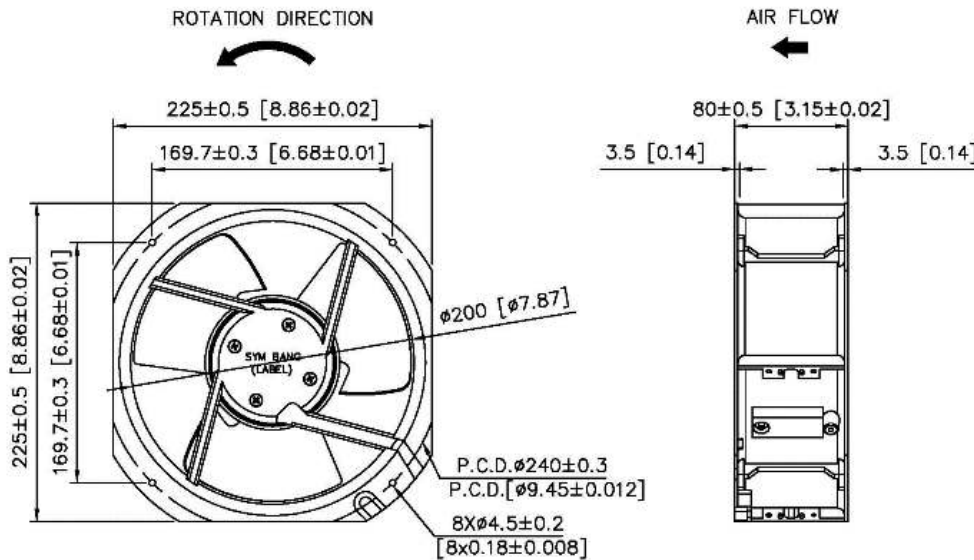

UNIT: mm[inch]

SYMBANG

# AIR PERFORMANCE

