

D

28080M-P

280x280x80mm(11.02"x11.02"x3.15")



HOUSING	Aluminum Die Casting
IMPELLER	Metal
BEARING	Ball
MOTOR TYPE	Outer Rotor, Single Phase Motor
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	2.5 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


280

 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D28080V24HBM-P	24	5.0	120.0	2750	1	25.3	1110	31.41	68
D28080V48HBM-P	48	2.6	124.8	2750	1	25.3	1110	31.41	68

DIMENSION

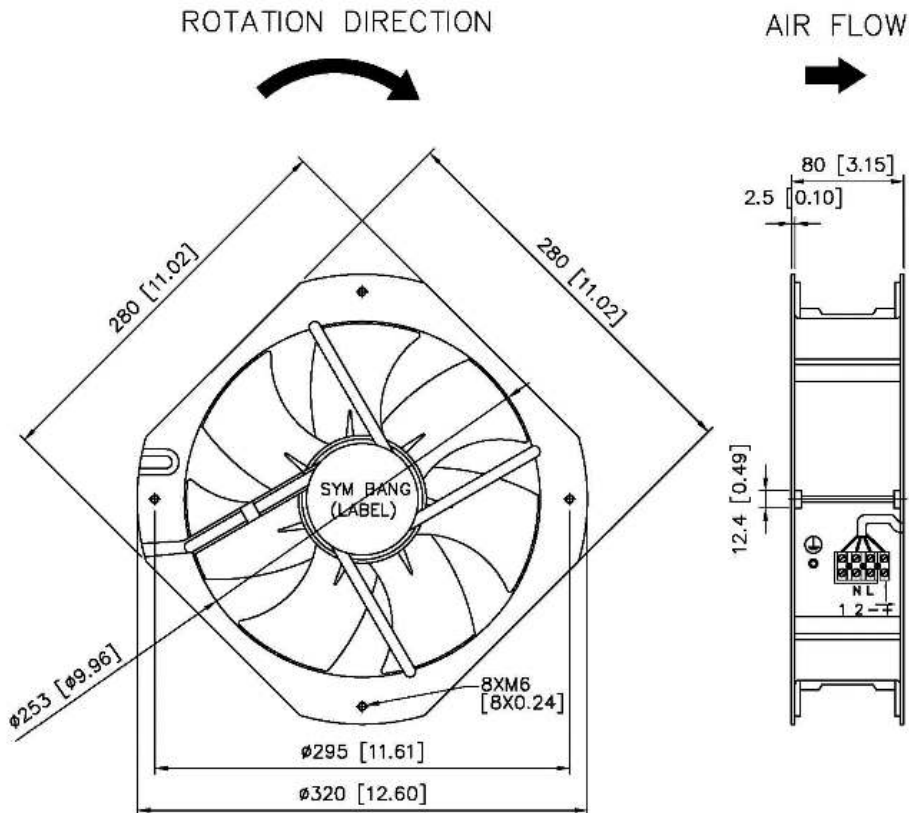

UNIT: mm[inch]



AIR PERFORMANCE

