


DB 2008



20x20x8.5mm(0.78"x0.78"x0.31")

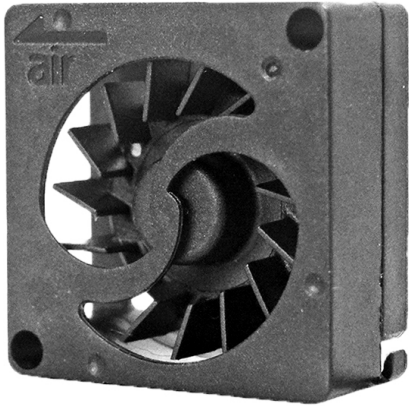


HOUSING Thermoplastic PBT, UL94V-0
 IMPELLER Thermoplastic PBT, UL94V-0
 BEARING Sleeve
 OPERATING TEMPERATURE -10°C to + 60°C
 DIELECTRIC STRENGTH 5mA Max. at 500 VAC for 1 minute
 INSULATION RESISTANCE 10M Ω min. @500 VDC
 WEIGHT 2.9 g
 ROHS COMPLIANCE Yes
 APPLICATION For pocket Projector, MID, UMPC, Smartbook, CCTV, Portable GPS, Micro Fuel Cell, Portable Gas/ Particulate Detector, Portable Plasma Generator, Mask/ Goggle/Helmet/ Ventilation and Defrosting
 IP LEVEL IP21 (Special IP Rating On Request)

20 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB2008V3HS	3.3	0.085	0.280	10000	0.137	3.48	0.63	0.017	21.8
DB2008V5HS	5	0.125	0.625	14000	0.290	7.36	0.89	0.025	31.1

DIMENSION

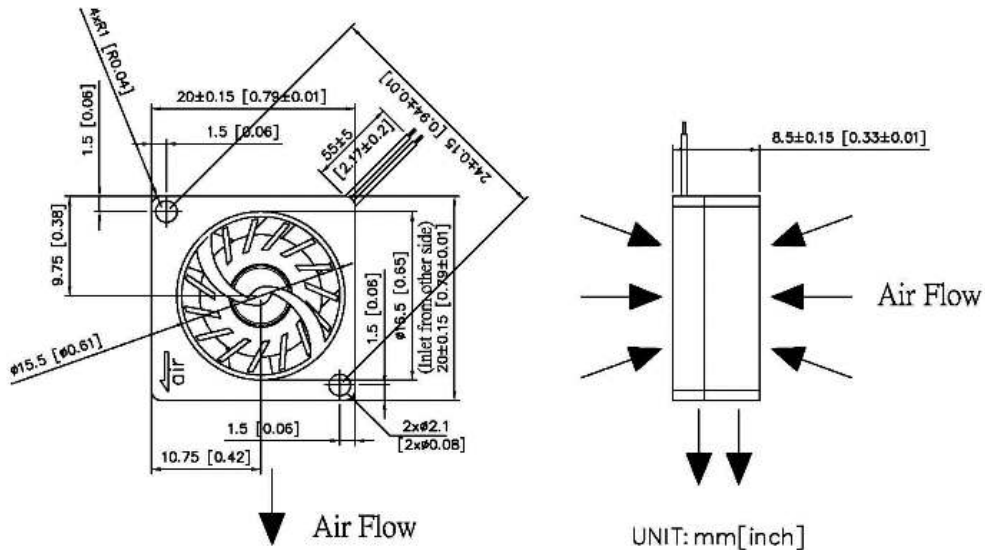

AIR PERFORMANCE

