


DB

4010-TK

40x40x10mm(1.57"x1.57"x0.39") **CE**

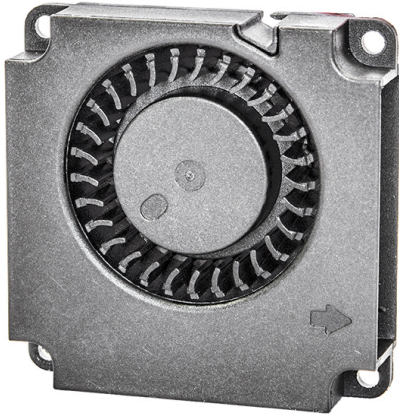


HOUSING Thermoplastic PBT, UL94V-0
IMPELLER Thermoplastic PBT, UL94V-0
BEARING Ball or sleeve
OPERATING TEMPERATURE -10°C to +70°
DIELECTRIC STRENGTH 5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE 10M Ω min. @500 VDC
WEIGHT 10 g
ROHS COMPLIANCE Yes
IP LEVEL IP21 (Special IP Rating On Request)

40 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB4010V12SM-TK	12	0.12	1.44	9000	0.506	12.86	2.76	0.078	35.0
DB4010V12SL-TK	12	0.10	1.20	8000	0.374	9.50	2.42	0.069	32.1
DB4010V12H-TK	12	0.09	1.08	7000	0.282	7.17	2.03	0.057	29.3
DB4010V12M-TK	12	0.062	0.74	6000	0.193	4.89	1.64	0.046	26.0
DB4010V12L-TK	12	0.046	0.55	5000	0.119	3.03	1.34	0.038	23.3
DB4010V12XL-TK	12	0.025	0.30	4000	0.085	2.15	1.09	0.031	18.9
DB4010V12SH-TK	12	0.146	1.75	10000	0.548	13.93	3.20	0.091	37.0
DB4010V5XL-TK	5	0.06	0.30	4000	0.085	2.15	1.09	0.031	18.9
DB4010V5L-TK	5	0.11	0.55	5000	0.119	3.03	1.34	0.038	23.3
DB4010V5M-TK	5	0.15	0.75	6000	0.193	4.89	1.64	0.046	26.0
DB4010V5H-TK	5	0.21	1.05	7000	0.282	7.17	2.03	0.057	29.3
DB4010V5SL-TK	5	0.25	1.25	8000	0.374	9.50	2.42	0.069	32.1
DB4010V5SM-TK	5	0.29	1.45	9000	0.506	12.86	2.76	0.078	35.0
DB4010V5SH-TK	5	0.35	1.75	10000	0.548	13.93	3.20	0.091	37.0

DIMENSION

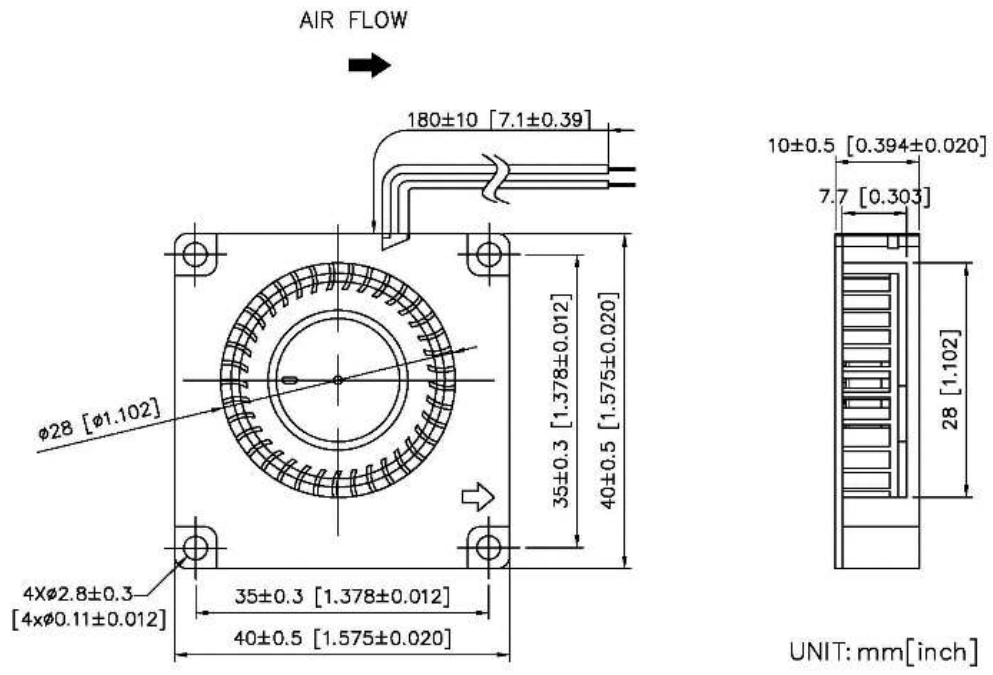

AIR PERFORMANCE

