




REV	E.C.N NO.	CONTENT	CHK	DATE



4.60




12.50

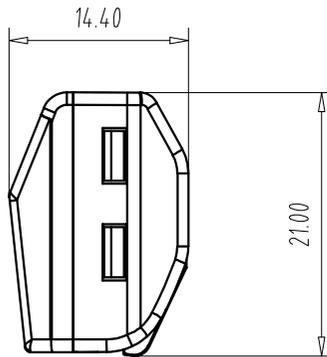

14.40

21.00



NOTES1:

- 1.Rating voltage/current: 400V/32A
- 2.wire range: 0.08-2.5mm<sup>2</sup>,4.0mm<sup>2</sup>sol

NOTES2:

- 1.Housing: PA66
- 2.Conductor: Copper
- 3.Spring:Stainless Steel

NOTES3:

- 1.Stripping length: 9-10mm
- 2.Operating temperature: -20°C~+105°C

How to order

ULO - 222-412

Certificate      Factory  
Series NO.      Code

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//								
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	320	0	30	53	70	90	115	150	200	250	320	0	10	all	0	100	150	150	150	150	0	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	CKK	DATE	21.11.04	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	ULO-222-412
				DWGNO.	UL0Y000A