

A

9238DV-S

92x92x38mm(3.6"x3.6"x1.5")




| | |
|-------------------------|--|
| HOUSING | Aluminum Die Casting, Painted Black |
| IMPELLER | Thermoplastic PBT, UL91V-0 |
| BEARING | Ball or Sleeve |
| OPERATING TEMPERATURE | -10°C to + 70°C |
| INSULATION | Class A |
| OPERATING VOLTAGE RANGE | 100 VAC to 120 VAC for 115V Type 200 VAC to 240 VAC for 230V Type |
| DIELECTRIC STRENGTH | 5mA Max. at 1500 VAC for 1 second |
| INSULATION RESISTANCE | 10M Ω min. @500 VDC |
| MOTOR TYPE | Shaded Pole Motor |
| SAFETY | Impedance Protected |
| TERMINATION | Lead Wire |
| WEIGHT | 450 g |
| ROHS COMPLIANCE | Yes |
| DUAL VOLTAGE | 115/230 VAC |
| IP LEVEL | IP21 (Special IP Rating On Request) |

92mm


SPECIFICATION

| MODEL NO. | RATED VOLTAGE(V) | RATED CURRENT(A) | INPUT POWER(W) | SPEED (RPM) | MAX. AIR PRESSURE | | MAX. AIR FLOW | | NOISE dB(A) @1M |
|--------------|------------------|------------------|----------------|-------------|-------------------|---------|---------------|-----------|-----------------|
| | | | | | inchH2O | mmH2O | CFM | m3/min | |
| A9238DVHBL-S | 230 | 0.024/0.024 | 4.3/4.3 | 2200/1950 | 0.34/0.24 | 3.3/2.4 | 32/32 | 0.91/0.91 | 19 |
| A9238DVLBL-S | 115 | 0.15/0.13 | 12.8/11.3 | 2700/3200 | 0.16/0.22 | 4.3/5.5 | 42/50 | 1.19/1.42 | 32 |

DIMENSION

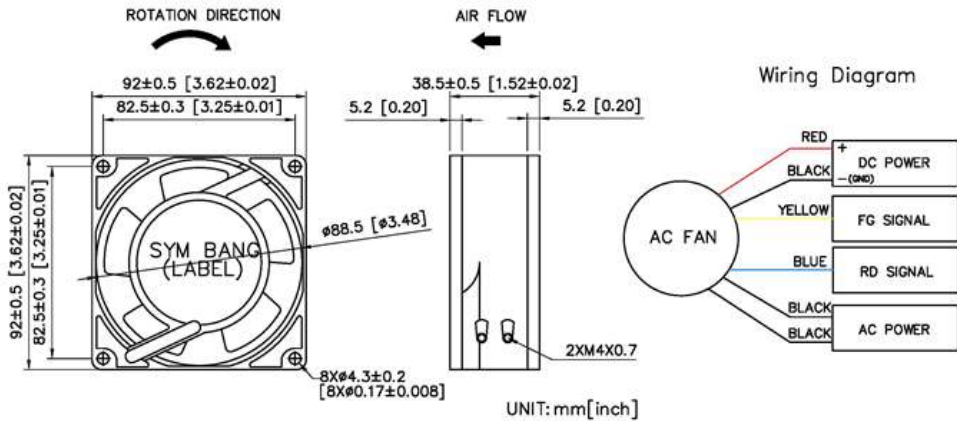

Dual Voltage Wire Diagram

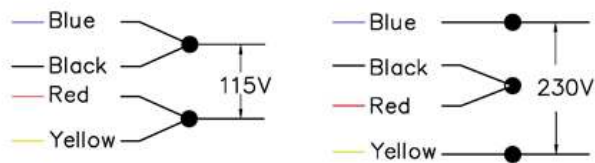

SYMBANG

AIR PERFORMANCE

