

# A

# 12038-JS

120x120x38mm(4.7"x4.7"x1.5")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-20°C to + 80°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	103 VAC to 126 VAC for 115V Type 207 VAC to 253 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Outer Rotor, Capacitor motor
SAFETY	Impedance Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	540 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


# 120

mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A12038V1H-JS	115	0.12/0.12	15/15	2700/3200	0.35/0.41	9/10.5	105/120	2.97/3.39	43/47
A12038V2H-JS	230	0.10/0.10	15/15	2700/3200	0.35/0.41	9/10.5	105/120	2.97/3.39	43/47

## DIMENSION

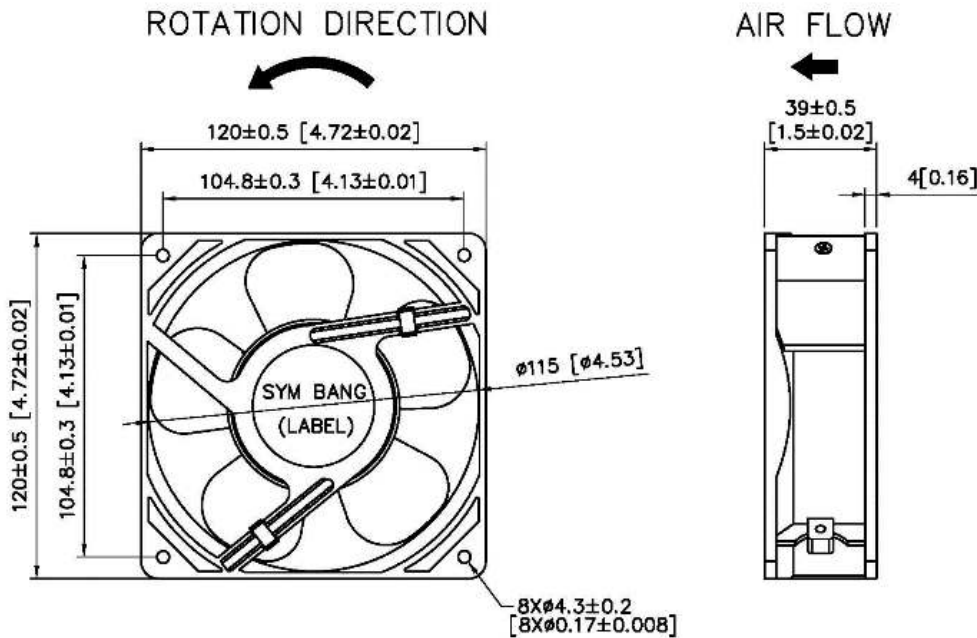

UNIT: mm[inch]

# AIR PERFORMANCE

