

A

17238-DA

172x151x38mm(6.8"x5.9"x1.5")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-20°C to + 70°C
INSULATION	Class B
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1800 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	800 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP54(Special IP Rating On Request)

172mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17238V1HB-DA	115	0.25/0.21	27.0/25.0	2700/3100	0.55/0.61	14.0/15.5	210/250	5.91/7.07	53/59
A17238V2HB-DA	230	0.11/0.11	25.0/24.0	2700/3100	0.55/0.61	14.0/15.5	210/250	5.91/7.07	53/59

DIMENSION

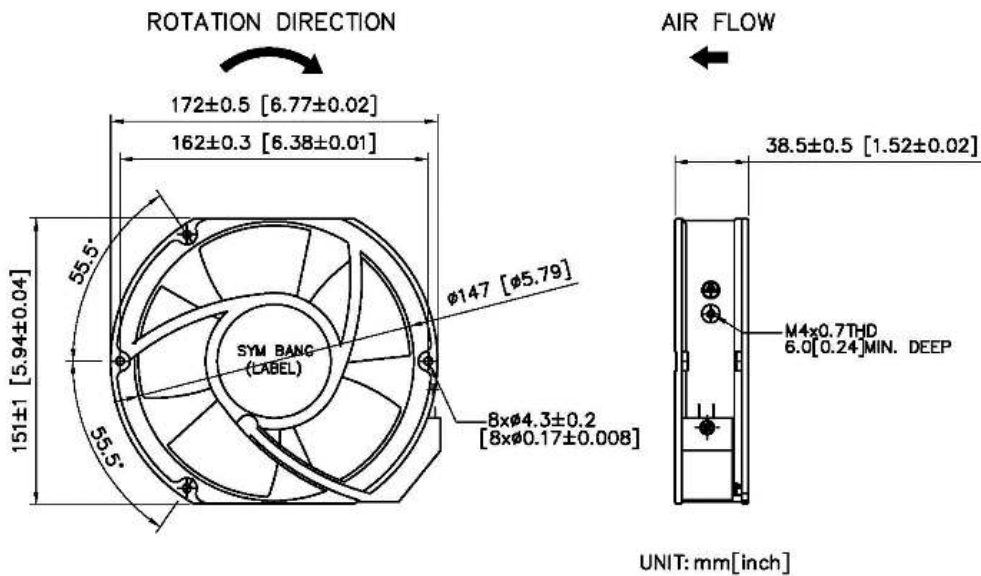

SYMBANG

AIR PERFORMANCE

