

A

17251

172x151x51mm(6.8"x5.9"x2")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	875 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

172mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17251V1H	115	0.22/0.28	25/31	2850/3350	0.66/0.64	16.8/16.3	198/226	5.6/6.4	57/61
A17251V1L	115	0.15/0.15	17/16	1400/1750	0.14/0.22	3.47/5.6	99/118	2.8/3.4	39/45
A17251V2H	230	0.11/0.15	25/32	2850/3350	0.66/0.64	16.8/16.3	198/230	5.6/6.5	57/61
A17251V2L	230	0.06/0.07	14/14	1400/1750	0.14/0.22	3.47/5.6	99/119	2.8/3.4	39/44

DIMENSION

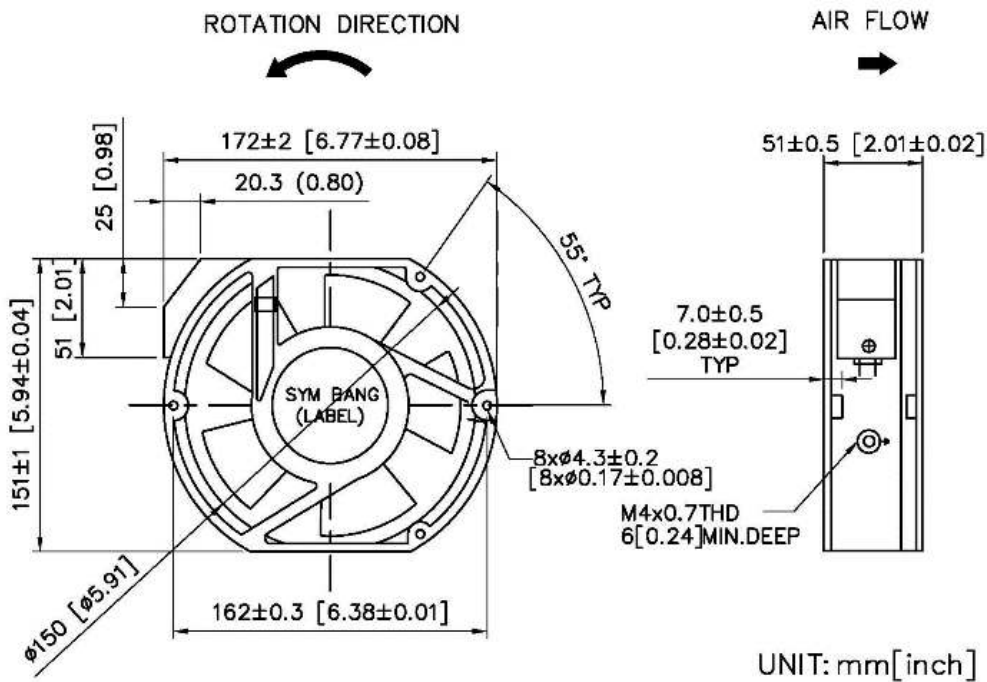

SYMBANG

AIR PERFORMANCE

