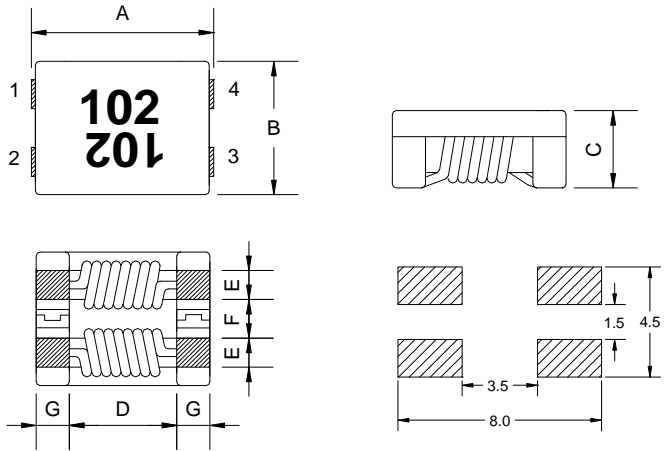


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE FILTER CHOKE	SPEC NO.	SP-0201019001
ITEM	JSCM 0706-102 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	7.0	±0.5
	B	6.0	±0.5
	C	3.8	MAX.
	D	3.5	TYP.
	E	1.5	±0.5
	F	1.5	±0.5
	G	1.7	±0.5

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.		
IMPEDANCE	800 (min.) 1020 (typ.)	Ω	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	100	MHz	<input type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter.
RDC (1 line)	17 (max.)	mΩ	<input checked="" type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter.
Rated Current	3 (max.)	A	<input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
Rated Volt.	80 (max)	Vdc	
Insulation Resistance	10 (min)	MΩ	

REMARK :


1. Operating temperature range : - 40°C to + 125°C (Including self temp. rise)
2. Storage temperature range : -40~+125°C (on board)
3. Marking : Laser Marking

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0201019001

Typical Impedance v.s. Frequency Curve

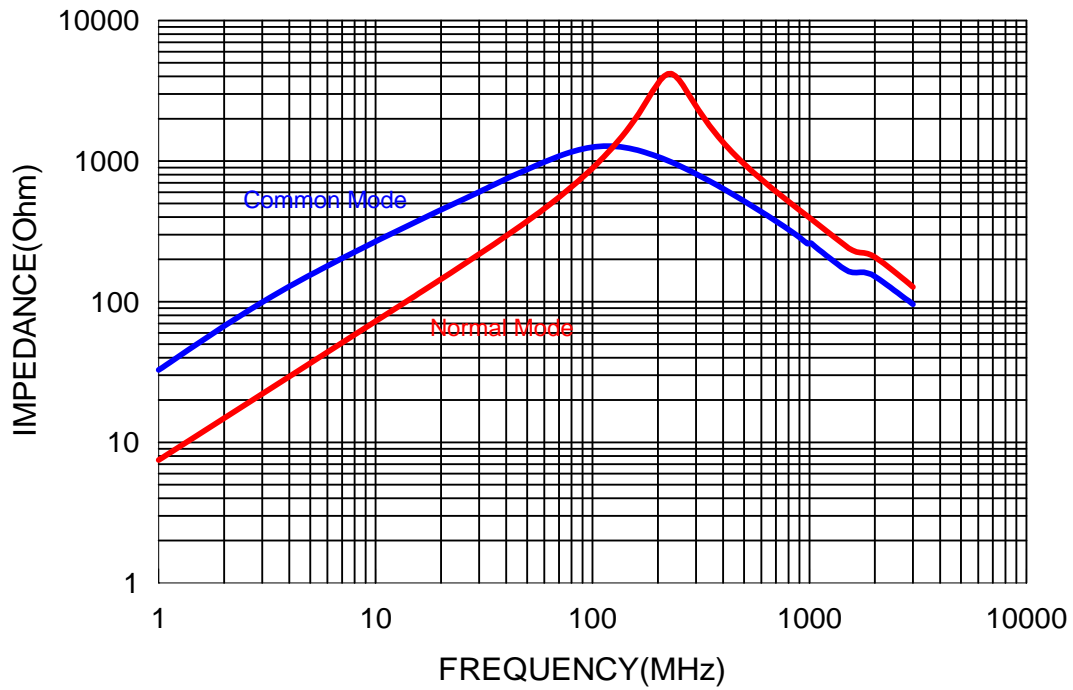

Check by :



Test by :

