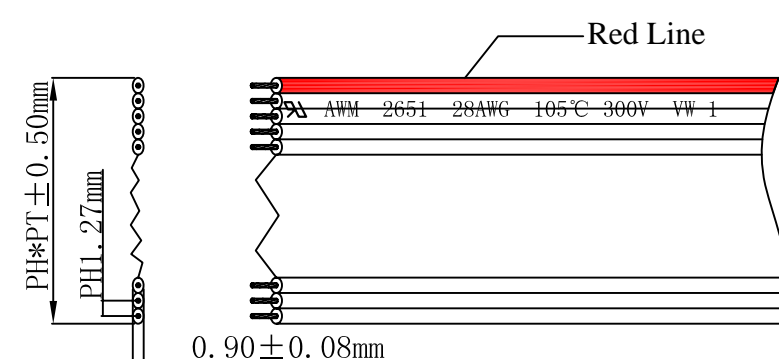


WCH 东莞市稳畅电子制品有限公司

规格书

UL MODEL 品名	UL2651	DOCUMENT NO 编号	2011062013	REV: 版次	1.0V
SPECIFICATION 规格	28AWG Ph:1.27mm	MADE DATE 制作日期	2011-06-20		
CROSS SECTION 截面图	 <p style="text-align: center;">Can be made as per customer requirement for 2-50P</p>				
TECHNICAL PARAMETERS 技术参数					
CONDUCTOR 导体	SPECIFICATION	规格 (AWG)	28		
	MATERIAL	材质	Tinned Stranded Copper Wire		
	CONFIGURATION	结构 (mm)	TS7/0.127 ± 0.007		
INSULATION 绝缘	AVG. THICK	平均厚度 (mm)	0.24		
	MIN. THICK	最小厚度 (mm)	0.21		
	OVER DIAMETER	线径 (mm)	0.90 ± 0.08		
	MATERIAL	材质	Eco-friendly PVC38P (RoHS)		
	COLOR	颜色	WL 8002K Grey with Red line		
MARKING 印字	AWM 2651 28AWG 105°C 300V VW-1 E214500 WL CSA AWM I A 28AWG FT1 105°C 300V LL210593 +LF+ ***** (日期码变动)				
JACKET 外被	AVG. THICK	平均厚度 (mm)	/		
	MIN. THICK	最小厚度 (mm)	/		
	OVER DIAMETER	线径 (mm)	/		
	MATERIAL	材质	/		
	COLOR	颜色	/		
ELECTRICAL CAPABILITY 电气	RATED TEMPERATURE	额定温度 (°C)	105		
	RATED VOLTAGE	额定电压 (V)	300		
	COND. RESISTANCE	导体电阻 (Ω /KM20°C)	239		
	INSU. RESISTANCE	绝缘电阻 (MΩ /KM20°C)	2.5		

制作: 周义

核准:



客户确认: