
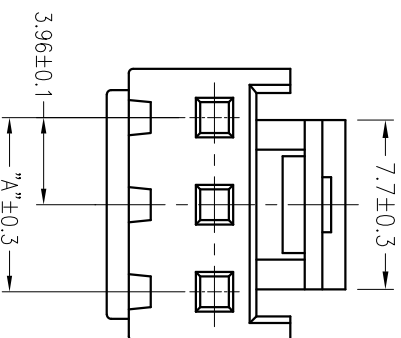


Poles	DIM.A	DIM.B
2Y	3.96	8.25
3Y	7.92	12.21
4Y	11.88	16.17
5Y	15.84	20.13
6Y	19.80	24.09
7Y	23.76	28.05
8Y	27.72	32.01
9Y	31.68	35.97
10Y	35.64	39.93
11Y	39.60	43.89
12Y	43.56	47.85

ROHS

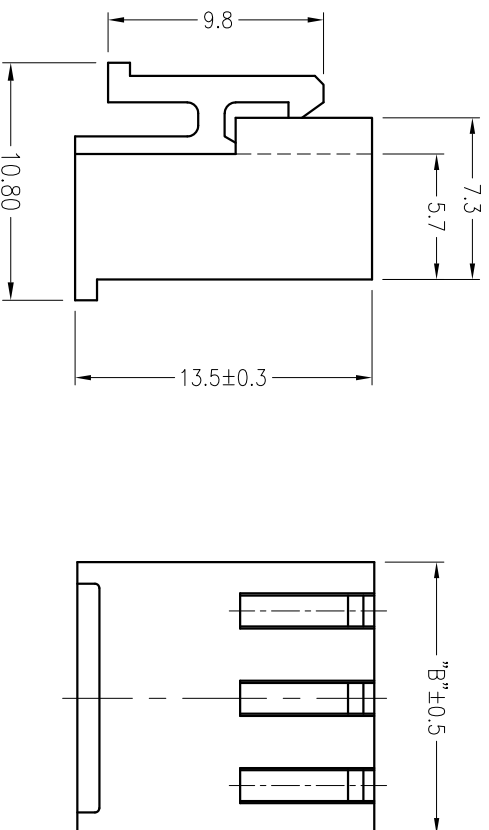

■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#16~#22
- ◆ Applicable Wire: AWG#16~#22
- ◆ 额定电压: 250V DC/AC(rms)
- ◆ Rated voltage: 250V DC/AC(rms)
- ◆ 额定电流: 7A(AWG#18)
- ◆ Rated Current: 7A(AWG#18)
- ◆ 耐压值: 1500V AC/minute
- ◆ Withstand voltage: 1500V AC/min.
- ◆ 工作温度: -25°C ~ +85°C
- ◆ Working Temp : -25°C ~ +85°C
- ◆ 绝缘电阻: $\geq 1000 \text{ M}\Omega$
- ◆ Insulation resistance: $\geq 1000 \text{ M}\Omega$
- ◆ 接触电阻: $\leq 10 \text{ m}\Omega$
- ◆ Contact resistance: $\leq 10 \text{ m}\Omega$

■ 材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V0
- ◆ Insulator: Nylon66, UL94-V0



JIMD
Dongguan Jinda Electronics Co., Ltd
东莞市津达电子有限公司

GENERAL TOLERANCE	
XX: ± 0.40	
X: ± 0.30	
.X: ± 0.25	X.* $\pm 2^\circ$
.XX: ± 0.15	.X.* $\pm 1^\circ$

SCALE:	3:1
UNIT:	mm
SIZE: A4	

DRAWN:	柴艳妮
CHECK:	于 腾
APPROVE:	肖志军

DATE:	2016. 11. 13
DATE:	2016. 11. 13
DATE:	2016. 11. 13

DOC. NO:	E:\DWG\Production\XH
PARTS NO:	VH-NY

TITLE:	工程图
--------	-----

REV.	A
SHEET:	1/1