



FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

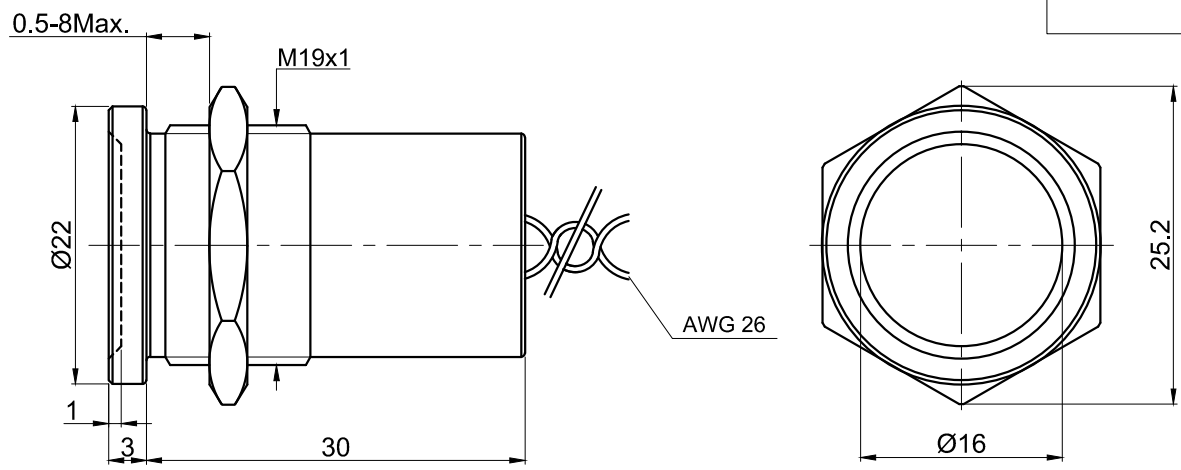


Part Number:PS193Z10Y◆1


"◆"	Colour/Materials
NT	Natural anodized (Al alloy)
BU	Blue anodized (Al alloy)
BK	Black anodized (Al alloy)
GD	Gold anodized (Al alloy)
RD	Red anodized (Al alloy)
SS	Stainless steel
GN	Green anodized (Al alloy)

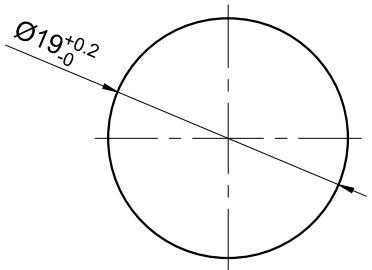

PANEL CUTOUT
MAX.PANEL THICKNESS
8 mm

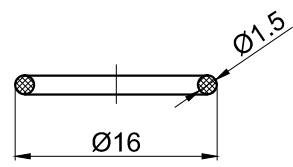


Seal Ring



Wiring Diagram

Black:24Vmax.
Black:24Vmax.

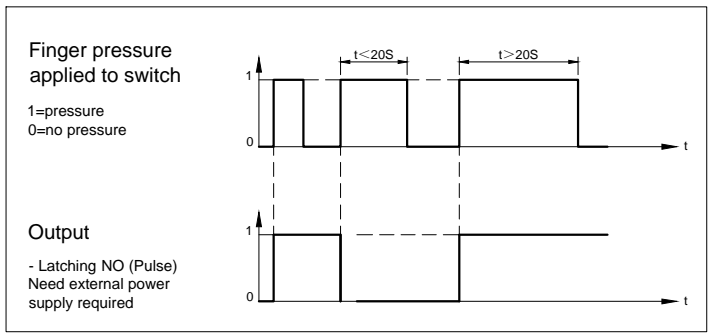

SPECIFICATIONS:

- 1.Switch Operation: Latching NO (Pulse).
- 2.Max.Switch Rating: 200mA 24VAC/DC.
- 3.Operation Life: 50 Million cycles.
- 4.Wiring: AWG 26, Length 300mm.
- 5.IP Class: IP69K.
- 6.Operating Temperature: -40℃~ +75℃.
- 7.Operating Force: About 5~10N.

MATERIALS:

- 1.Body:Al Alloy/Stainless steel .

BRAND 品牌	ONPOW	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
USED 用途	APPD 审核	CH	2020/05/11		
FINISH 处理	CHKD 校对	NCH	2020/05/11		
SCALE 比例	UNIT 单位	DR. 制图	ZPD 2020/05/11		
DIMENSIONS	TOLERANCE	TITLE 名称		Piezo electric Switch	
0.00 TO 18.00mm	±0.43mm	DWG NO. 图号		PS193Z10Y	
18.01 TO 30.00mm	±0.52mm	FILE NAME 档案名称	PS193.DWG	SHEET 张	1 / 1
30.01 TO 50.00mm	±0.62mm	REV. 更改	1		
50.01 TO 80.00mm	±0.74mm				