

1

2

3

4

5

6

7

FOR  
客户名称APPROVED  
客户确认签字ATTN  
销售负责人

LED: GREEN/WHITE

LED: YELLOW/WHITE

LED: RED/WHITE

9.3

11.3

Ø36

6 Max.

M30X1.5

13.8

33.5

41

Ø30+0.2  
Ø30-0.0

0.6


Ø33.8

Ø29.8

SEAL RING

PANEL CUTOUT

## LACK OF PHASE INDICATION DIAGRAM

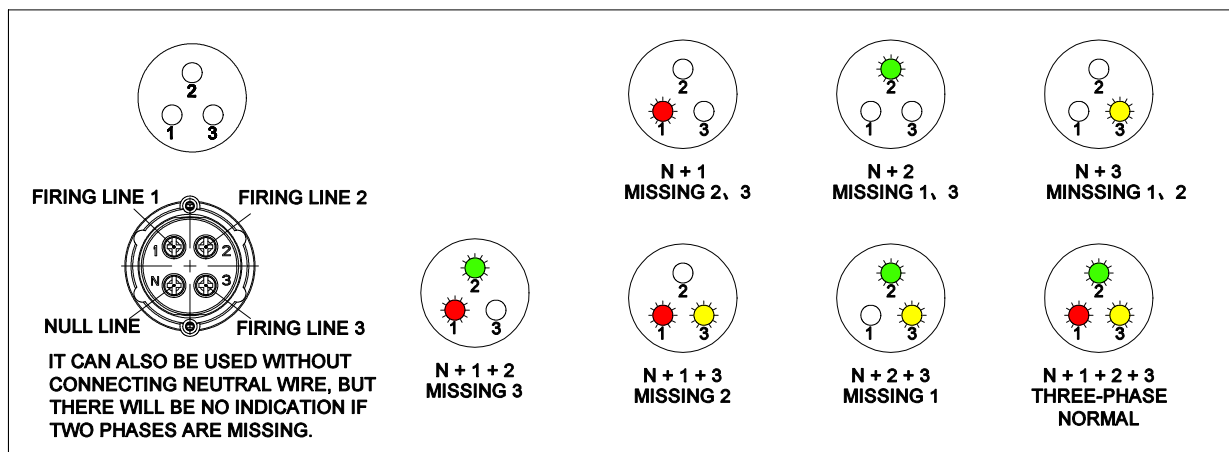

PART NUMBER:AD16-30V/△

"△"	LAMP COLOR
RGY	RED/GREEN/YELLOW
W	WHITE/WHITE/WHITE

## SPECIFICATIONS:

- 1.ELECTRICAL LIFE: ≥40,000 HOURS.
- 2.VOLTAGE BETWEEN 2 PHASES: 380V±20%.
- 3.VOLTAGE BETWEEN PHASES & NEUTRAL: 220V±20%.
- 4.FREQUENCY: 50/60Hz.
- 5.POWER FREQUENCY WITHSTAND VOLTAGE: 1890VAC 50HZ(BETWEEN LIVE PART AND CONTACTABLE SURFACE).
- 6.TORQUE: ABOUT 0.8Nm MAX. APPLIED TO NUT.
- 7.OPERATING TEMPERATURE: -20°C~ +55°C(NO FREEZING).
- 8.TERMINAL TYPE: SCREW(FOR WIRE MAX. 1.5mm²).
- 9.GENERAL TOLERANCE:0-18mm=±0.25, 18-80mm=±0.52.

## MATERIALS:

- 1.HEAD: PC.
- 2.BODY: PA.

BRAND 品牌

红波按钮制造有限公司

ONPOW 欧宝龙®

ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

TITLE 名称	AD16 SERIES INDICATOR		UNIT 单位	mm
DWG NO. 图号	AD16-30V	SCALE 比例	0.8 : 1	SIZE 图纸
FILE NAME 档案名称	AD16-30V.DWG	DRAWN 制图	YDY 2022/08/04	SHEET 张
			1/1	REV. 更改
				1

1

2

3

4

5

6

7