

1

2

3

4

5

6

7

FOR
客户名称APPROVED
客户确认签字ATTN
销售负责人


A

B

C

D

E

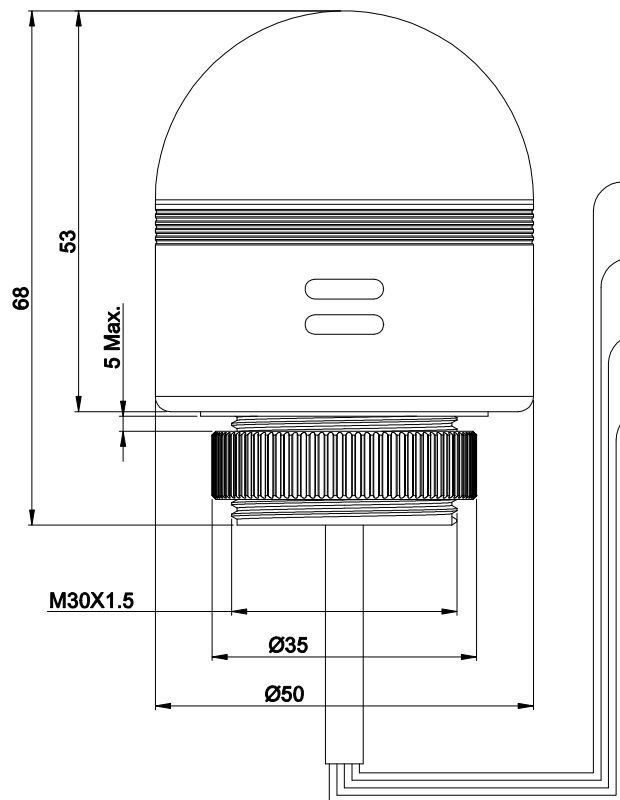

GRAY WIRE (BUZZER)


RED WIRE (RED LED)

YELLOW WIRE (YELLOW LED)

GREEN WIRE (GREEN LED)

BLACK WIRE (POWER CABLE)

24VDC

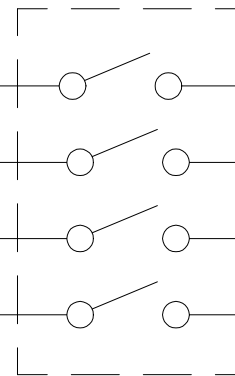

POWER SUPPLY

PART NUMBER: HBJD-50C-□/24V/Y

"□"	SIGNAL SOURCE
DZ	CONTINUAL LIGHT AND BUZZER
SW	FLASH LIGHT AND DISCONTINUOUS BUZZER

SPECIFICATIONS:

- 1.STORAGE TEMPERATURE: -30°C~ +80°C.
- 2.OPERATING TEMPERATURE: -25°C~ +55°C(NO FREEZING).
- 3.RELATIVE HUMIDITY: ≤98%.
- 4.ALTITUDE: ≤2000M.
- 5.VIBRATION RESISTANCE: 50HZ, AMPLITUDE 1.2mm.
- 6.CONTINUOUS WORKING TIME:
40000 HOURS(LED TYPE: CONTINUAL LIGHT);
25000 HOURS(LED TYPE: FLASH LIGHT).
- 7.SOUND PRESSURE INTENSITY: 70~80DB(1m).
- 8.POLLUTION LEVEL: LEVEL 3 (CONDUCTING POLLUTION, OR DRY NON-CONDUCTIVE POLLUTION IS CONDUCTIVE DUE TO CONDENSATION).
- 9.PROTECTIVE DEGREE: IP65(CAN BE CUSTOMIZED IP67).
- 10.TAIL CONFIGURATION: WIRE LEAD, LENGTH=700mm.
- 11.GENERAL TOLERANCE: 0-18mm=±0.25, 18-80mm=±0.52.

MATERIALS:

- 1.HEAD: PC.
- 2.BODY: AL ALLOY(BLACK).

BRAND 品牌

ONPOW 欧宝龙®

红波按钮制造有限公司

ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

TITLE 名称	WARNING LIGHT		UNIT 单位	mm
DWG NO. 图号	HBJD-50C-Y(BUZZER)	SCALE 比例	1:1	SIZE 图纸
FILE NAME 档案名称	HBJD-50C.DWG	DRAWN 制图	YDY 2022/03/03	SHEET 张
			1/1	REV. 更改
				1

1

2

3

4

5

6

7