

SPECIFICATION FOR APPROVAL

COMMODITY	FERRITE BEADS		SPEC NO. SP-080327002
ITEM	RH 3.5×9.0×0.8 Green	版本：D	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	3.5	± 0.15
	B	9.0	± 0.30
	C	52.0	± 2.00
	D	0.68	Max
	E	6.0	± 1.00
	F	5.0	± 0.50
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">IMPEDANCE at Z 1</td> <td style="width: 20%; text-align: center;">80</td> <td style="width: 10%;">(min)</td> <td style="width: 10%;">Ω</td> </tr> <tr> <td>IMPEDANCE at Z 2</td> <td style="text-align: center;">120</td> <td>(min)</td> <td>Ω</td> </tr> <tr> <td>IMPEDANCE at Z 3</td> <td style="text-align: center;">10</td> <td>(max)</td> <td>Ω</td> </tr> <tr> <td></td> <td style="text-align: center;">0.5</td> <td>(min)</td> <td>Ω</td> </tr> <tr> <td>TEST FREQUENCY at Z 1</td> <td style="text-align: center;">25</td> <td></td> <td>MHz</td> </tr> <tr> <td>TEST FREQUENCY at Z 2</td> <td style="text-align: center;">100</td> <td></td> <td>MHz</td> </tr> <tr> <td>TEST FREQUENCY at Z 3</td> <td style="text-align: center;">200</td> <td></td> <td>KHz</td> </tr> <tr> <td>TEST VOLT</td> <td style="text-align: center;">0.25</td> <td></td> <td>V</td> </tr> </table>	IMPEDANCE at Z 1	80	(min)	Ω	IMPEDANCE at Z 2	120	(min)	Ω	IMPEDANCE at Z 3	10	(max)	Ω		0.5	(min)	Ω	TEST FREQUENCY at Z 1	25		MHz	TEST FREQUENCY at Z 2	100		MHz	TEST FREQUENCY at Z 3	200		KHz	TEST VOLT	0.25		V	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input type="checkbox"/> ZENTECH 502AC Resistance Meter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
IMPEDANCE at Z 1	80	(min)	Ω																														
IMPEDANCE at Z 2	120	(min)	Ω																														
IMPEDANCE at Z 3	10	(max)	Ω																														
	0.5	(min)	Ω																														
TEST FREQUENCY at Z 1	25		MHz																														
TEST FREQUENCY at Z 2	100		MHz																														
TEST FREQUENCY at Z 3	200		KHz																														
TEST VOLT	0.25		V																														


REMARK :
 絕緣阻抗:9.99GΩ
 漏電流:0mA

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN

TEST REPORT

COMMODITY :	FERRITE BEADS	SPEC NO :	SP-080327002
Type :	RH 3.5×9.0×0.8	版本 : D	表單編號 : QRRD-01-02

Typical Impedance v.s. Frequency Curve

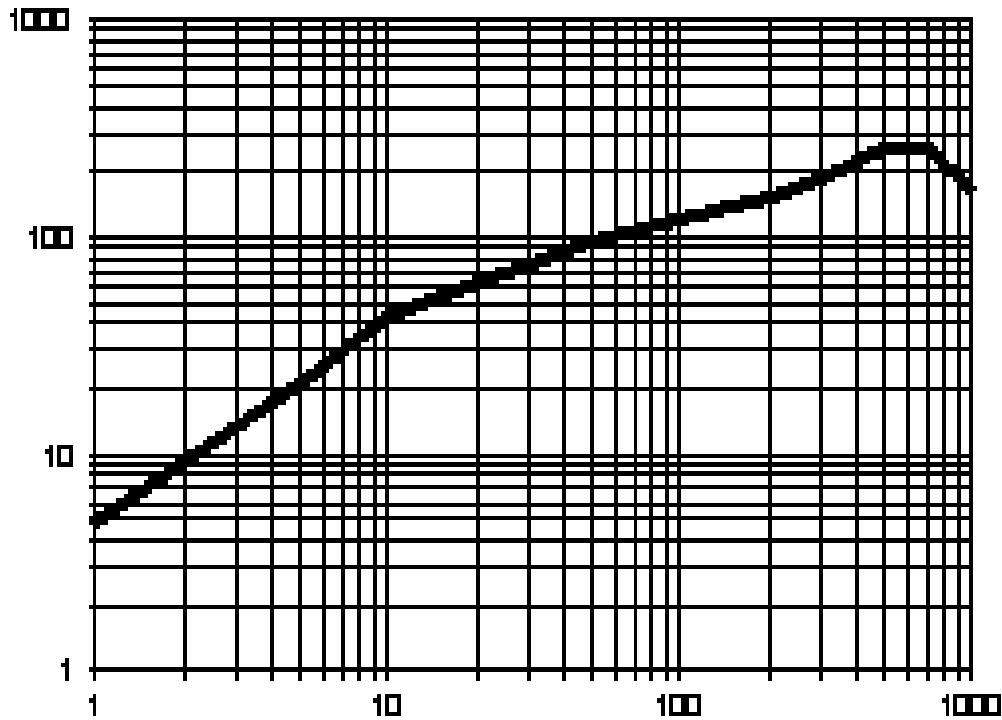

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :

