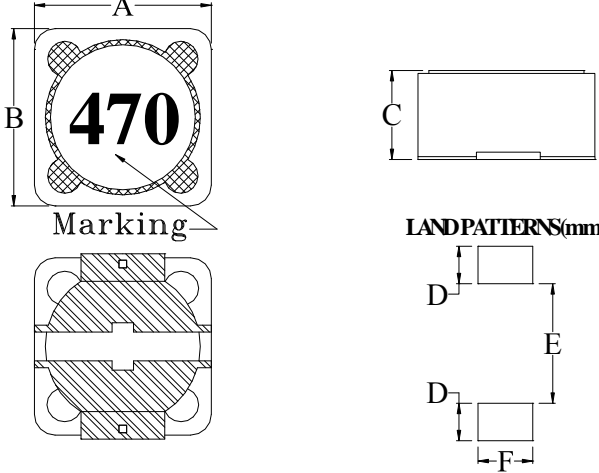


# ECN HISTORY LIST

版別	ECN NO	變更內容	變更日期	確認章
0		新發行	2006/4/7	
1		A/B尺寸統一定義為12.5 Max	2017/6/23	

# SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060720109
ITEM	JPRH 1205-470M-3R5-A <span style="border: 1px solid black; padding: 2px;">Green</span>	版本：D	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 <p style="text-align: center;">LAND PATTERNS(mm)</p>	A	12.5	Max.
	B	12.5	Max.
	C	6.0	Max.
	D	2.8	REF.
	E	7.0	REF.
	F	5.4	REF.
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	47 ± 20%	μH	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	1	KHz	<input type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter.
TEST VOLT	0.25	V	<input checked="" type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Meter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
RDC	75 (max)	mΩ	
Isat	2.6 (max)	A	
Irms	3.5 (max)	A	

**REMARK :**

1. Inductance drop = 25% typ at Isat.
2. ΔT = 40°C rise typ at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			



# SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060720109
ITEM	JPRH 1205-470M-3R5-A <span style="border: 1px solid black; padding: 2px;">Green</span>	版本：D	表單編號：QRRD-01-02
<b>(3) Material List</b>			
NO	ITEM	MATERIAL	NOTE
1	CORE	DR 9.9*5.2 & RI 12.1*5.1*10.65 Or other's equivalent	
2	BASE	C1100	
3	WIRE	SFBW Or other's equivalent	155°C CLASS
4	SOLDER	100H Or other's equivalent	
5	EPOXY	6020H-6-9(NH) / S-9001A-6B Or other's equivalent	
6	INK	SMD-48A Or other's equivalent	Black
7	TAPE	MYLAR TAPE	Yellow
REMARK :			
PURCHASER CONFIRMED :		APPROVED	CHECKED
		