




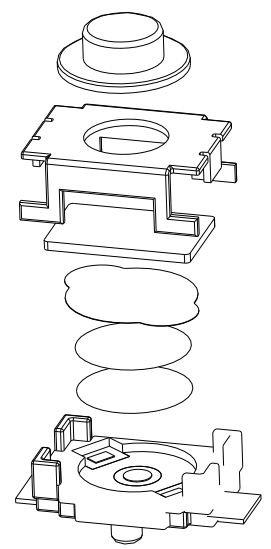
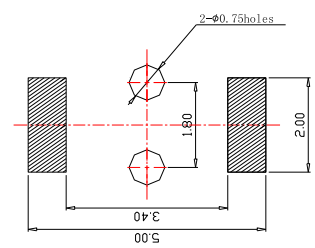


技术参数/Specifications		
额定参数/Rating	0.05 A 12VDC	
环境温度/Environment Temperature	-25℃ ~ 85℃	
接触电阻 Contact Resistance	≤ 30mΩ	
绝缘电阻/Insulation Resistance	≥ 100MΩ (at 500VDC)	
耐压 Withstand Voltage	针脚-针脚 Terminal-Terminal	100V AC/10mA/5s
	针脚-手柄 Terminal-knob	500V AC/10mA/5s
电气寿命 Electrical life	100000 Cycles	
操作力 Operating Force	250gf ± 30gf	

H
1.8
2.0
2.5



电路图

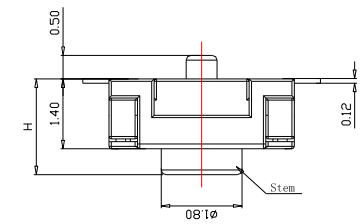

PCB. 焊接图

借(通)用件登记 BORROW (GENERAL) FILE NO.
旧底图总号 OLD DRAWING FILE NO.
底图总号 DRAWING FILE NO.
签名 AUTOGRAPH
日期 DATE

NOTE:
TOLERANCE UNLESS OTHERWISE SPECIFIED
X. ± 0.30 . X ± 0.20 . XX ± 0.10

					成品图 PRODUCT DRAWING				 浙江佳龙电子有限公司 ZHEJIANG JIALONG ELECTRONIC CO., LTD	
									轻触开关 Tact Switch	
									TC-03A	
标记 MARK	实数 NO.	更改文件号 REVISE FILE NO.	签名 AUTOGRAPH	日期 DATE	投影 PROJECTION	版次 REV.	重量 WT.	比例 SCALE		
设计 DESIGN		杨渝	标准化 STANDARDIZATION		第一角 1:1	A0		1:1 (A4)		
审核 CHECKED		施江缙	批准 APPROVE	龙亨军	共 1 页 ALTOGETHER 1 PAGES				第 1 页 THE 1 PAGE	
工艺 TECHNOLOGY			日期 DATE	2015.06.12						