


ES1A THRU ES1J
SURFACE MOUNT SUPER FAST RECTIFIER
Reverse Voltage - 50 to 600 Volts Forward Current - 1.0 Ampere

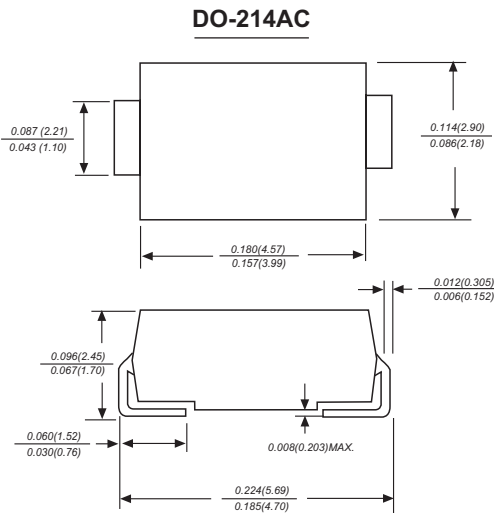

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Super fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C ±5°C 10seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic body
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	UNITS	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	VOLTS	
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	VOLTS	
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	600	VOLTS	
Maximum average forward rectified current at $T_A=55^\circ C$	$I_{(AV)}$	1.0							Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0							Amps	
Maximum instantaneous forward voltage at 1.0A	V_F	0.95				1.3		1.7	Volts	
Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=100^\circ C$	I_R	5.0				50.0				μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	35							ns	
Typical junction capacitance (NOTE 2)	C_J	15.0							pF	
Typical thermal resistance (NOTE 3)	R_{qJA}	60.0							$^\circ C/W$	
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150							$^\circ C$	

Note: 1. Reverse recovery condition $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$
 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 3. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES ES1A THRU ES1J

