
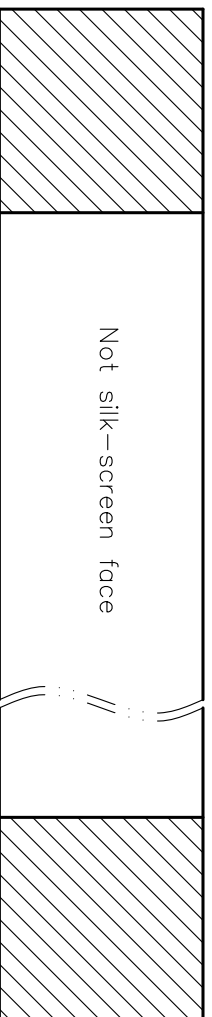
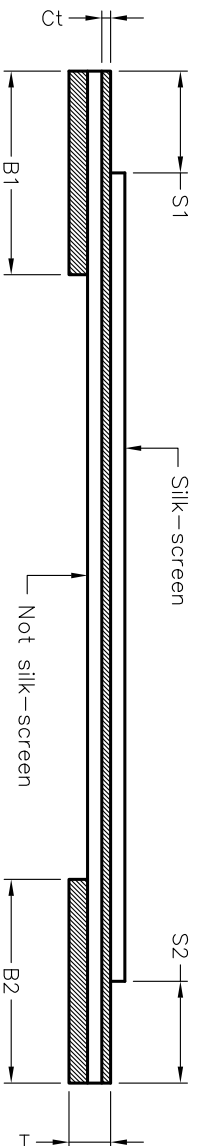
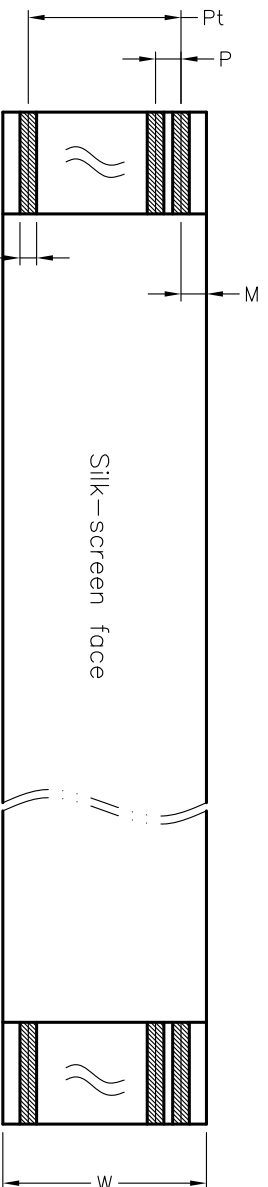


BOM				
No.	Item	Specification	Remarks	
1	Insulation film	White PET(43 $\mu$ m)	flame retardant rating VW-1	
2	Reinforcement plate	Blue PET(225 $\mu$ m)		
3	Conductors (Flat copper wire)	Thickness	0.05mm	$\pm 0.005$
		Width	0.8mm	$\pm 0.03$
4	Number of Conductors	Plating	Sn	$\geq 1\mu$ m
		N	21	

Dimensions (Unit: mm)				
1	Total length	TL	150	$\pm 3$
2	Total width	W	27	$\pm 0.15$
3	Margin width	M	1.25	$\pm 0.1$
4	Pitch	P	1.25	$\pm 0.1$
5	Span	Pt	25.0	$\pm 0.15$
6	Thickness of connection area	T	0.3	$\pm 0.05$
		S1	5	$\pm 1.0$
7	Strip length	S2	5	$\pm 1.0$
		B1	10	$\pm 1.5$
8	Reinforcement length	B2	10	$\pm 1.5$

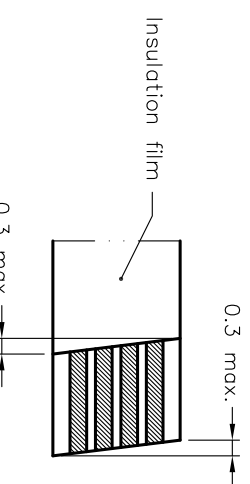

**JINID**  
Dongguan Jinda Electronics Co., Ltd.

GENERAL TOLERANCE		SCALE:	DRAWN:	DATE:
XX	$\pm 0.40$	3.5:1	Luoshengrong	2024.4.20
X	$\pm 0.30$	UNIT:	CHECK:	DATE:
X	$\pm 0.25$	mm		
.XX	$\pm 0.15$	SIZE:	APPROVE:	DATE:
		A4	Xiaozhi jun	2024.4.20

DOCUMENT NO:

PARTS NO: A1.25x21x150-551010B5T

TITLE: DRAWING

REV. A

SHEET: 1/1