



IS 13252  
(except for 48V)



IEC61558-1  
IEC61558-2-16



Note 5



TP TC004



IEC62368-1  
IEC61558-1  
IEC61558-2-16



UL62368-1



Note 4



## Features


- AC input range selectable by switch
- Withstand 300VAC surge input for 5 second
- Up to 200% peak power capability
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Built-in cooling Fan ON-OFF control
- Compliance to IEC/BS EN/EN61558-1 and 62368-1
- Withstand 5G vibration test
- LED indicator for power on
- No load power consumption < 1W
- Over voltage category III (OVC III)
- High operating temperature up to 70°C
- Operating altitude up to 2000 meters
- High efficiency, long life and high reliability
- 3 years warranty

## Description

LRS-350N2 series is a 350W single-output enclosed type power supply with 30mm of low profile design. Adopting the input of 115VAC or 230VAC (select by switch), the entire series provides an output voltage line of 12V, 24V, 36V and 48V. In addition to the high efficiency up to 89%, with the built-in long life fan LRS-350N2 can work under -25~+70°C with full load. Delivering an extremely low no load power consumption (less than 0.75W), it allows the end system to easily meet the worldwide energy requirement. LRS-350N2 has the complete protection functions and 5G anti-vibration capability; it is complied with the international safety regulations such as IEC/UL 62368-1. LRS-350N2 series serves as a high price-to-performance power supply solution for various industrial applications. Moreover, LRS-350N2 can provide 200% short-duration peak power for motor applications and electro mechanical loads requiring much higher power during start-up.

## Model Encoding

LRS - 350 N2 - 24

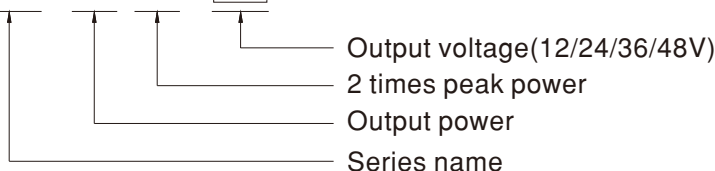

## Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus
- For inductive and capacitive load


## GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


**SPECIFICATION**

| MODEL               |   | LRS-350N2-12   | LRS-350N2-24 | LRS-350N2-36 | LRS-350N2-48 |
|---------------------|---|--|--------------|--------------|--------------|
| OUTPUT              | DC VOLTAGE  | 12V  | 24V          | 36V          | 48V          |
|                     | RATED CURRENT   | 29A  | 14.6A        | 9.7A         | 7.3A         |
|                     | CURRENT RANGE   | 0 ~ 29A  | 0 ~ 14.6A    | 0 ~ 9.7A     | 0 ~ 7.3A     |
|                     | RATED POWER   | 348W   | 350.4W       | 349.2W       | 350.4W       |
|                     | RIPPLE & NOISE (max.) Note.2  | 150mVp-p   | 150mVp-p     | 200mVp-p     | 200mVp-p     |
|                     | VOLTAGE ADJ. RANGE  | 10.2 ~ 13.8V   | 21.6 ~ 28.8V | 32.4 ~ 39.6V | 43.2 ~ 52.8V |
|                     | VOLTAGE TOLERANCE   | ± 1.5%   | ± 1.0%       | ± 1.0%       | ± 1.0%       |
|                     | LINE REGULATION   | ± 0.5%   | ± 0.5%       | ± 0.5%       | ± 0.5%       |
|                     | LOAD REGULATION   | ± 1.0%   | ± 0.5%       | ± 0.5%       | ± 0.5%       |
|                     | SETUP, RISE TIME  | 1300ms, 50ms/230VAC    1300ms,50ms/115VAC at full load   |              |              |              |
| HOLD UP TIME (Typ.) | 16ms/230VAC    12ms/115VAC at full load   |  |              |              |              |
| INPUT               | VOLTAGE RANGE   | 90 ~ 132VAC / 180 ~ 264VAC by switch    240 ~ 370VDC (switch on 230VAC)  |              |              |              |
|                     | FREQUENCY RANGE   | 47 ~ 63Hz  |              |              |              |
|                     | EFFICIENCY (Typ.)   | 85%  | 88%          | 88.5%        | 89%          |
|                     | AC CURRENT (Typ.)   | 6.8A/115VAC    3.8A/230VAC   |              |              |              |
|                     | INRUSH CURRENT (Typ.)   | 60A/115VAC    60A/230VAC   |              |              |              |
|                     | LEAKAGE CURRENT   | <2mA / 240VAC  |              |              |              |
| PROTECTION          | OVER LOAD   | Output power >105% rated for more than 5 seconds then shut down o/p voltage, re-power on to recover<br>Output power >200% rated, hiccup mode, recovers automatically after fault condition is removed                    |              |              |              |
|                     | OVER VOLTAGE  | 13.8 ~ 16.2V   | 28.8 ~ 33.6V | 41.4 ~ 46.8V | 55.2 ~ 64.8V |
|                     | OVER TEMPERATURE  | Shut down and latch off o/p voltage, re-power on to recover.   |              |              |              |
| FUNCTION            | FAN ON/OFF CONTROL (Typ.)   | RTH3 ≥ 50°C FAN ON, ≤ 40°C FAN OFF   |              |              |              |
| ENVIRONMENT         | WORKING TEMP.   | -25 ~ +70°C (Refer to "Derating Curve")  |              |              |              |
|                     | WORKING HUMIDITY  | 20 ~ 90% RH non-condensing   |              |              |              |
|                     | STORAGE TEMP., HUMIDITY   | -40 ~ +85°C, 10 ~ 95% RH   |              |              |              |
|                     | TEMP. COEFFICIENT   | ± 0.03%/°C (0 ~ 50°C)  |              |              |              |
|                     | VIBRATION   | 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes   |              |              |              |
|                     | OVER VOLTAGE CATEGORY   | III: According to EN61558, EN50178, EN60664-1, EN62477-1; altitude up to 2000 meters   |              |              |              |
| SAFETY              | SAFETY STANDARDS  | IEC/UL 62368-1, BSMI CNS15598-1, EAC TP TC 004, BIS IS13252(Part1): 2010/IEC 60950-1: 2005(except for 48V); GB 4943.1, BS EN/EN61558-1, BS EN61558-2-16 Designed by BS/EN/EN62368-1, AS/NZS 61558.1/2.16, AS/NZS 62368.1 |              |              |              |
|                     | WITHSTAND VOLTAGE   | I/P-O/P:3.75KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC   |              |              |              |
|                     | ISOLATION RESISTANCE  | I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC / 25°C / 70% RH   |              |              |              |
|                     | EMC EMISSION  | Compliance to BSMI CNS15936, EAC TP TC 020   |              |              |              |
|                     | EMC IMMUNITY  | Compliance to BS EN/EN55035, EAC TP TC 020   |              |              |              |
| OTHERS              | MTBF  | 1857.9K hrs min. Telcordia SR-332 (Bellcore); 226.2Khrs min. MIL-HDBK-217F (25°C)  |              |              |              |
|                     | DIMENSION   | 215*115*30mm (L*W*H)   |              |              |              |
|                     | PACKING   | 0.76Kg; 15pcs/12.4Kg/0.67CUFT  |              |              |              |
| NOTE                | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</p> <p>3. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.</p> <p>4. This power supply does not meet the harmonic current requirements outlined by BS EN/EN61000-3-2. Please do not use this power supply under the following conditions:</p> <ul style="list-style-type: none"> <li>a) the end-devices is used within the European Union, and</li> <li>b) the end-devices is connected to public mains supply with 220Vac or greater rated nominal voltage, and</li> <li>c) the power supply is: <ul style="list-style-type: none"> <li>- installed in end-devices with average or continuous input power greater than 75W, or</li> <li>- belong to part of a lighting system</li> </ul> </li> </ul> <p>Exception:<br/>Power supplies used within the following end-devices do not need to fulfill BS EN/EN61000-3-2</p> <ul style="list-style-type: none"> <li>a) professional equipment with a total rated input power greater than 1000W;</li> <li>b) symmetrically controlled heating elements with a rated power less than or equal to 200W</li> </ul> <p>5. RCM is on voluntary basis and meets relevant IEC or AS/NZS standards complying with AS/NZS 4417.1</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p> |  |              |              |              |


■ Block Diagram

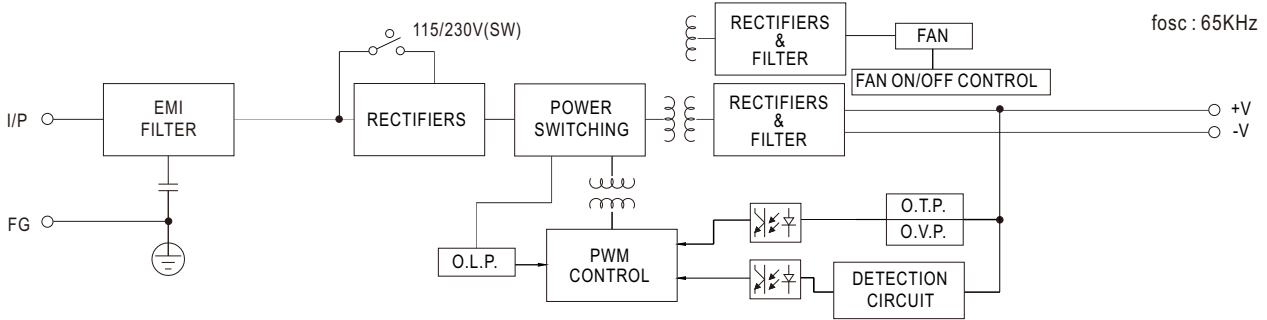

■ Derating Curve

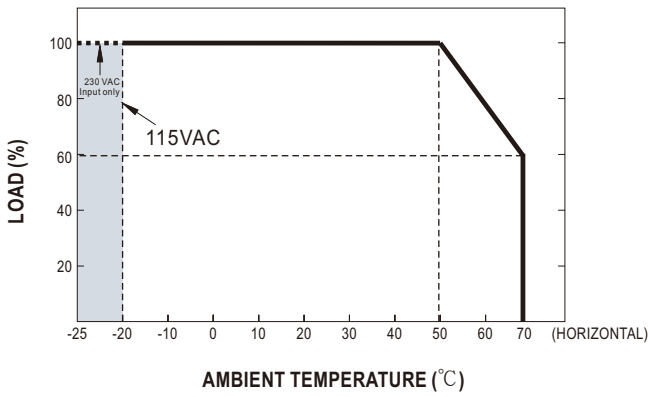

■ Static Characteristics

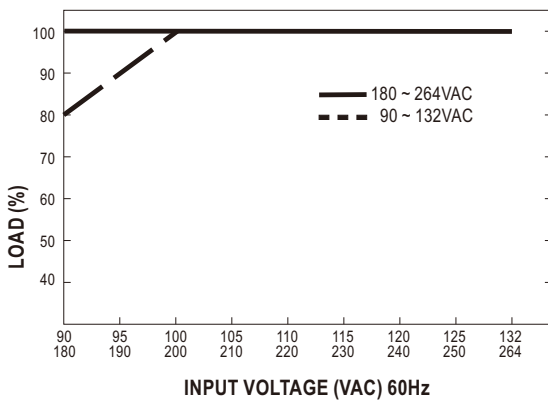


■ **Function Manual**

**1. Peak Power**

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$Duty = \frac{t}{T} \times 100\% \leq 35\%$$

$$t \leq 5 \text{ sec}$$

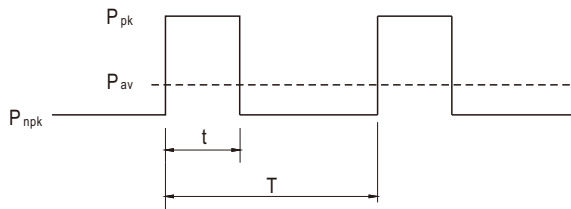

$P_{av}$  : Average output power (W)



$P_{pk}$  : Peak output power (W)

$P_{npk}$  : Non-peak output power (W)

$P_{rated}$  : Rated output power (W)

$t$  : Peak power width (sec)

$T$  : Period (sec)

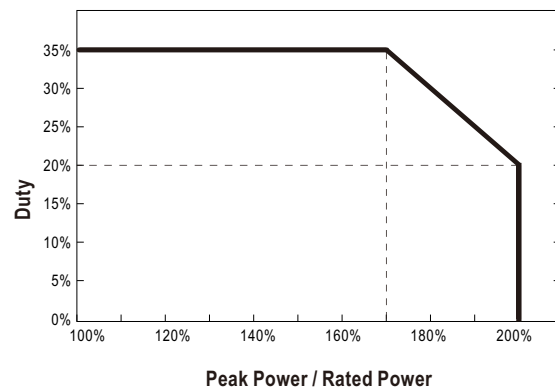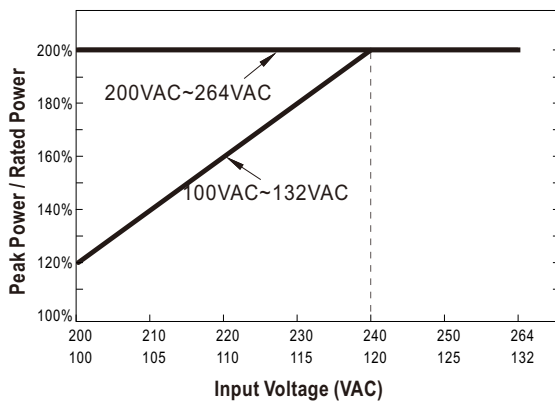

**For example (24 model)**

$V_{in} = 220VAC$ ,  $Duty_{max} = 10\%$

$P_{av} = P_{rated} = 350W$

$P_{pk} = 700W$


$t \leq 5sec$

$$T \geq \frac{5sec}{10\%} = 50sec$$

$$P_{npk} \leq \frac{TP_{av} - tP_{pk}}{T-t} = 311W$$

**Mechanical Specification**

Case No.207A Unit:mm

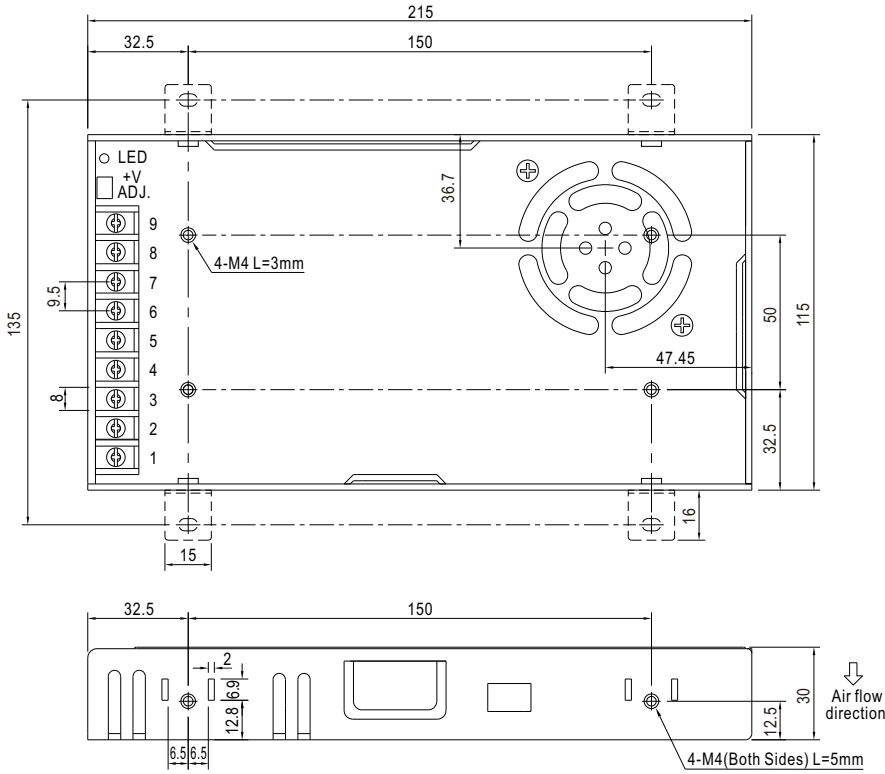

Terminal Pin No. Assignment :

| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4~6     | DC OUTPUT -V |
| 2       | AC/N       | 7~9     | DC OUTPUT +V |
| 3       | FG $\perp$ |         |              |

**Installation Manual**

Please refer to : <http://www.meanwell.com/manual.html>