


# SMA-3568

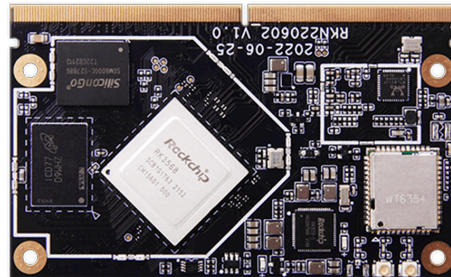

## Product Features

- Adapted with SMARC V2.1 standard
- Supports dual Gigabit Ethernet
- Supports 2 x USB 3.0 and 2 x USB 2.0
- Supports UART/SPI/I2C/GPIO/CAN interface
- Supports HDMI®, LVDS, MIPI CSI /MIPI DSI interface
- Supports 1 lane PCIe 2.1 and 2 lanes PCIe 3.0 interface
- Supports 4-bits SDIO 3.0 interface
- Supports Wi-Fi/BT function

## Specification

System Information	
Processor	Rockchip RK3568 Quad-core 64-bit Cortex-A55, 22nm lithography process, frequency up to 2.0GHz
NPU	1Tops@INT8, integrated high-performance AI accelerator RKNN NPU Supports one-click switching of Caffe/TensorFlow/TFLite/ONNX/PyTorch/Keras/Darknet
GPU	ARM G52 2EE Supports OpenGL ES 1.1/2.0/3.2, OpenCL 2.0, Vulkan 1.1 Embedded high-performance 2D acceleration hardware
VPU	Supports 4K 60fps H.265/H.264/VP9 video decoding Supports 1080P 60fps H.265/H.264 video encoding Supports 8M ISP, supports HDR
System Memory	2GB / 4GB / 8GB LPDDR4
Storage	
Storage	32GB / 64GB / 128GB eMMC

<b>External I/O Connector</b>	Ethernet: *2 (Giga ethernet) PCIe 2.1 *1(1 lane) PCIe 3.0 *1(2 lanes) USB2.0 *2 USB3.0 HOST *1 USB3.0 OTG *1 MIPI CSI *1(4 lanes) MIPI DSI *1(DSI0 & DSI1) HDMI®*1(HDMI®2.0) LVDS *1(multiplex with DSI1 ) Wi-Fi *1 GPIO *14 (or more) SDIO *1 UART *6 SPI *2 I2C *4 CAN *1 I2S *1
-------------------------------	---

## Mechanical & Environmental

<b>Power Requirement</b>	POWER: 5V/2A
--------------------------	--------------

---

<b>Dimension (L x W)</b>	82*50 mm
--------------------------	----------

---