

MATERIAL


Insulator : 30% Glass fiber PBT
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Dielectric voltage: 500V AC for one minute
Insulation Resistance : 1000MΩMin.
Contact Resistance : 10mΩMax.
Operation Temperature : -55°C to + 105°C

No. of pins	A	B	C	D
10	32.0	21.84	10.16	17.96
12	34.54	24.38	12.70	20.50
14	37.08	26.92	15.24	23.04
16	39.62	29.46	17.78	25.58
20	44.70	34.54	22.86	30.33
24	49.78	39.62	27.94	35.74
26	52.32	42.16	30.48	38.28
30	57.40	47.24	35.56	43.36
34	62.48	52.32	40.64	48.44
40	70.10	59.94	48.26	56.06
50	82.80	72.64	60.96	68.76
60	95.50	85.34	73.66	81.46
64	100.58	90.42	78.74	86.54

	SHORT	LONG
X	10.60	10.60
Y	4.30	7.80

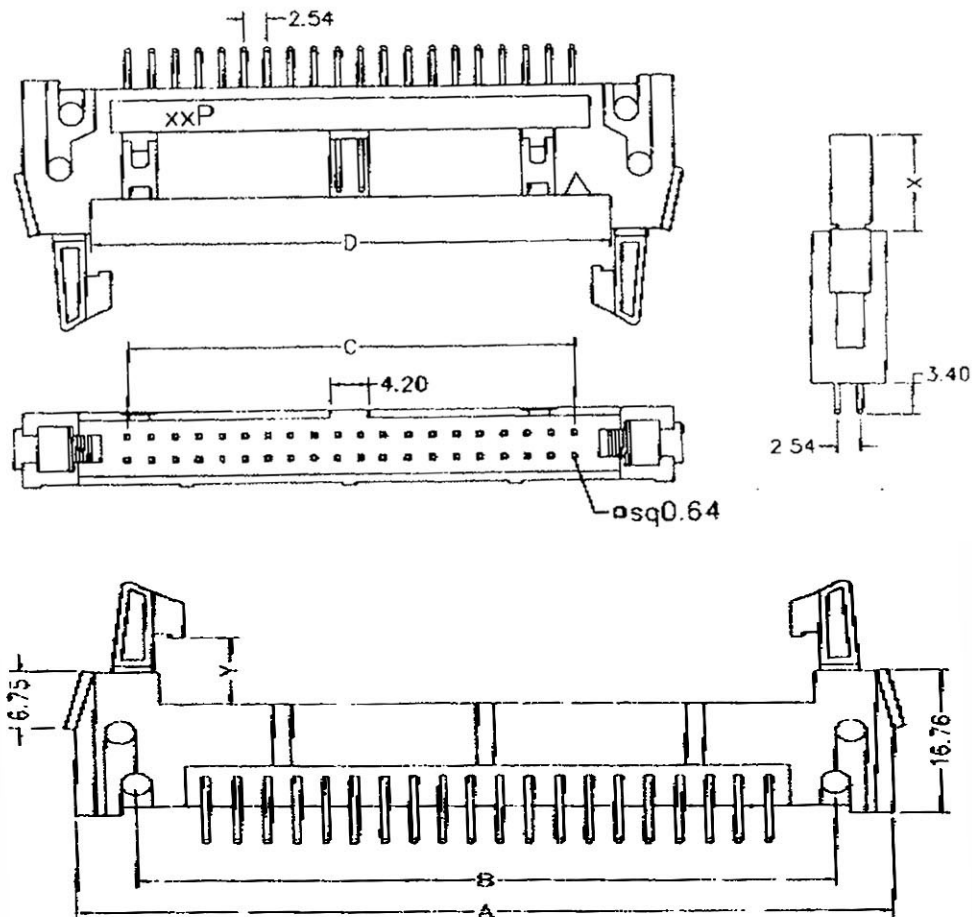

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名 FULLY SHROUDED HEADER ASSEMBLY 2.54mm X 2.54mm XXP 180° BLACK COLOR ROHS LOW-LEAD
DWG. 製圖	HELEN	SIZE. 線張尺寸	
DATE 制表日 2009/5/15	UNIT 單位	REV. 版本	PART NO. 料號
	M M	A 4	C3000-XXSXXB00R
	PAGE 張數	1 OF 1	