
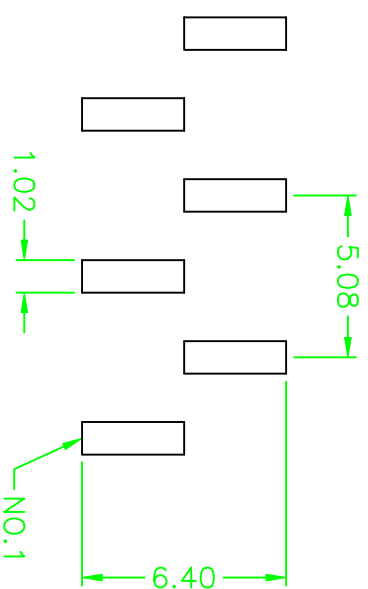
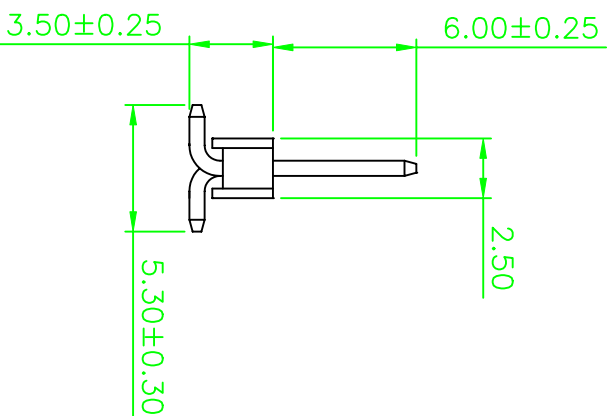
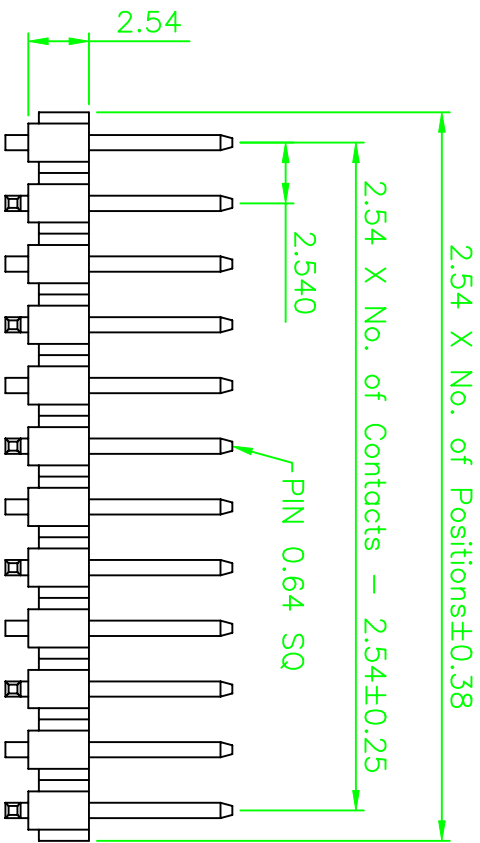


REV.	DESCRIPTION	DATE

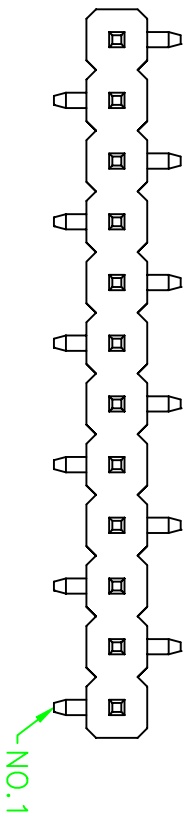

Recommended P.C. Board
Layout

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
Materials
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL94V-0 Nylon 6T
 All materials must be GP materials

Ordering Information

G PHC101 - XX XX A 01

No. of Pins per Row Contact Plating
 02-40 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold flash/Tin
 ...

格 菱 股 份 有 限 公 司
Greenconn Corporation

REV.	UNIT.	SCALE.	GENERAL TOLERANCE		DESIGN:	XIAO PING	DATE:	DWG. NO.	TITLE:
01	mm	3:1	X: ± 5°	X. ±	XAO PING	05-17-05	G PHC101-A01	2.54 PIN HEADER	
			X: ± 2°	X. ± 0.38	CHECKED:			SINGLE ROW SMT TYPE	
			.XX ± 1°	.XX ± 0.25	AUDITED:		G PHC101-XX XX A 01	BASE 2.54H	
			.XXX ± 0.5°	.XXX ± 0.13	APPROVED:				