
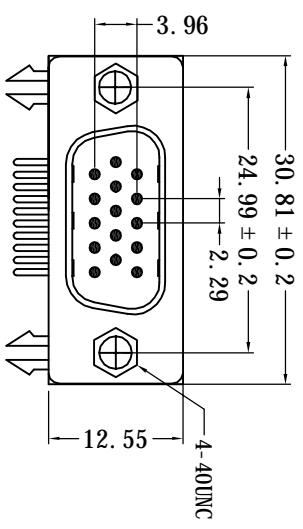



Specifications:
 Contact Resistance: 30mΩ max. at DC 100 mA
 Insulator Resistance: 1000MΩ min. at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding
 Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C--+105°C
 Contact: Brass
 Housing: PBT &30% Glass Fiber(Ul 94V-0)

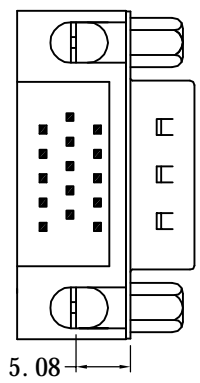

- 要求:
1. 塑料件无裂痕。
 2. 整排端子成一直线，相邻端子之间相互平行。

序号/Rev.No.	更改记录/Revision note	签名/Signature	日期/Date
------------	--------------------	--------------	---------

设计/Designed by	绘图/Draw ing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X: ±0.2 X: ±2° .X ±0.1 .X' ±1° .XX ±0.05 .XX' ±0.5° .xxx ±0.01
图名/Title		文件编号/File No.		
108-15P				
备注/Remark	页序/Sheet			单位/Units: mm



新亚电子
 XINYA ELECTRONIC CO., LTD