
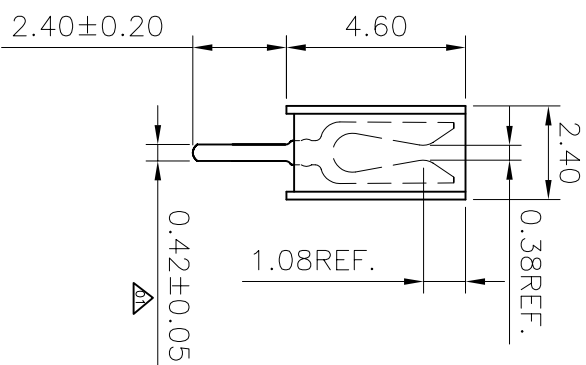
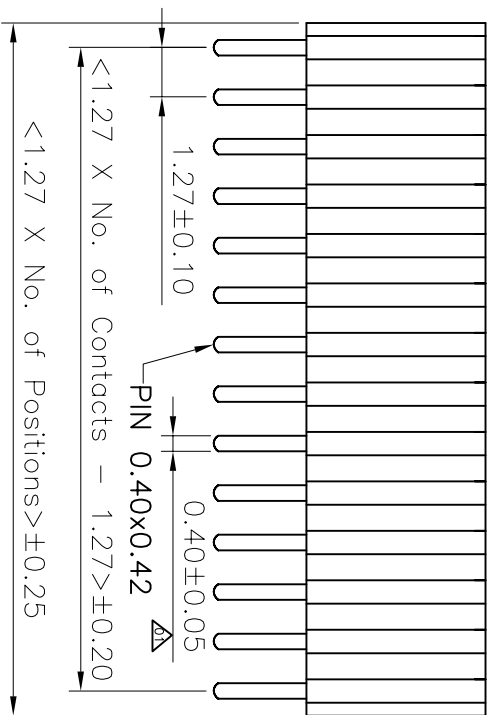


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
02		Add the dimension	2006.05.30	皮洪斌

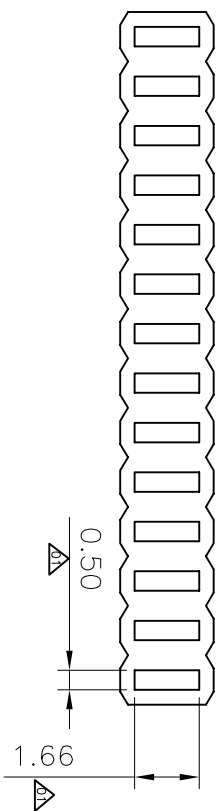

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials


Ordering Information

G SEA101 - XX XX A 01



No. of Pins per Row
 03-50
 Contact Plating
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

Recommended P.C.Board
 Hole Layout
 (Tolerance:±0.05)



REV. 02	UNIT. mm	SCALE. 1:1	PAGE. 1/1		GENERAL TOLERANCE		DESIGN: 皮洪斌	DATE: 2006.05.30	DWG. NO. G SEA101-A01	TITLE. 1.27 FEMALE HEADER SINGLE ROW DIP TYPE BASE 4.60
					X. ± 5°	X. ± 0.30	CHECKED:	DATE:	PART NO. G SEA101-XX XX A 01	
					X. ± 2°	X. ± 0.20	AUDITED:	DATE:		
					.XX ± 1°	.XX ± 0.15	APPROVED:	DATE:		
					.XXX ± 0.5°	.XXX ± 0.10				

格菱股份有限公司
 Greenconn Corporation

A

B

C

D

E

F

A

B

C

D

E

F