
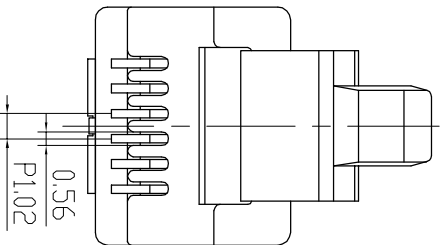
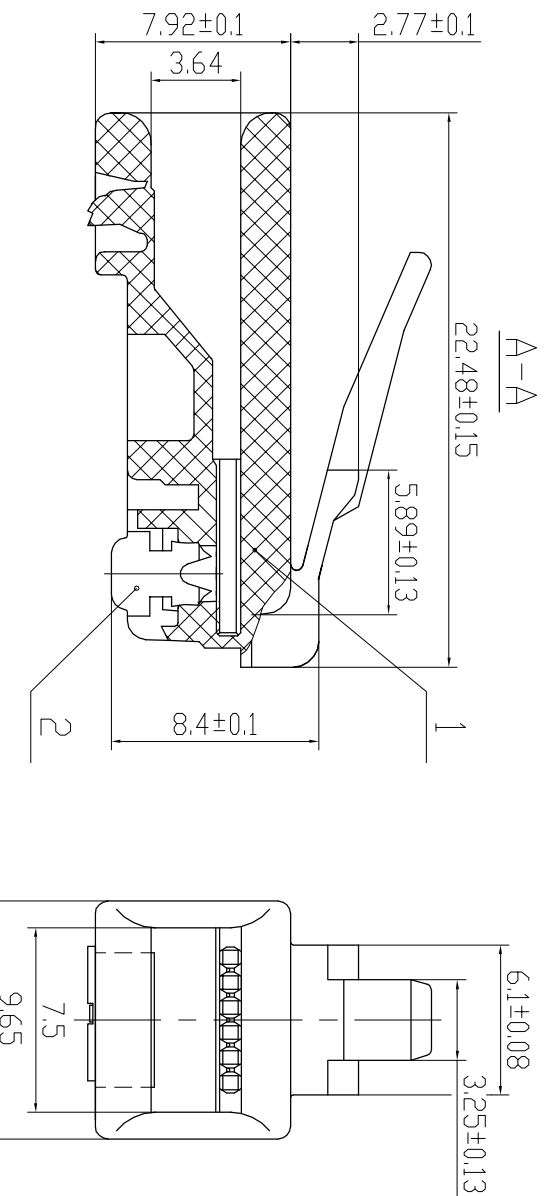


| | | |
|-----|----------|-----------------|
| 镀金 | 材料 | 易飞 |
| 3u" | PC透明普通环保 | A102-6603-A001 |
| G/F | PC透明普通环保 | A102-666GF-A001 |

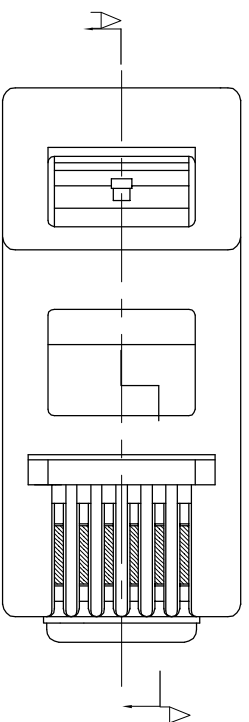


Notes:

1. Insulation Resistance: 1000 Megohms min;
2. Withstand Voltage: 1000V, AC/minute.
3. Durability: 1000 mating cycles min.
4. Selective Gold-plating: (3)6; (15)30; (50)micro inch.

RoHS Compliant

CZT

意华通讯连接器有限公司
YIHUA COMMUNICATED CONNECTOR CO.,LTD.



FIRST ANGLE PROJECTION

A4

SCALE 1:1
UNIT mm
CUSTOMER MODEL NO.

TOLERANCES
0~10±0.1
10~20±0.15
>20±0.2

MATERIAL: SEE TABLE
FINISH: SEE TABLE

SHEET 1 OF 1

DESIGNED:
CHECKED:
APPROVED:

| NO. | DWG NO. | NAME | DESCRIPTION |
|-----|-------------|----------------|-------------|
| 2 | QWY-1029-1 | BLADE | QS26.5-01 |
| 1 | QWY-1074-14 | 6P6C-LONG PLUG | PC UL94V-2 |

NAME: YH6-607 6P6C-F-LONG

DWG NO: H09022503

PART NO: SEE TABLE

REV 00

| REV. | ECN NO. | DATE |
|------|---------|------|
| | | |