
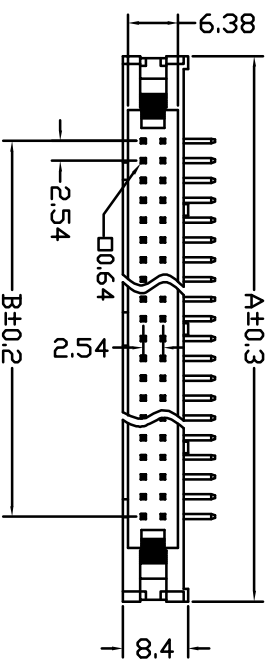
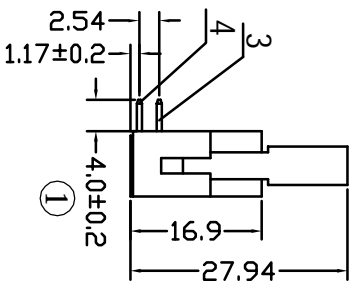


序号/Rev.No	名称/Title	文件编号/File No.
1	119塑件主体	
2	119塑件扣	
3	119端子(短弯)	
4	119端子(长弯)	

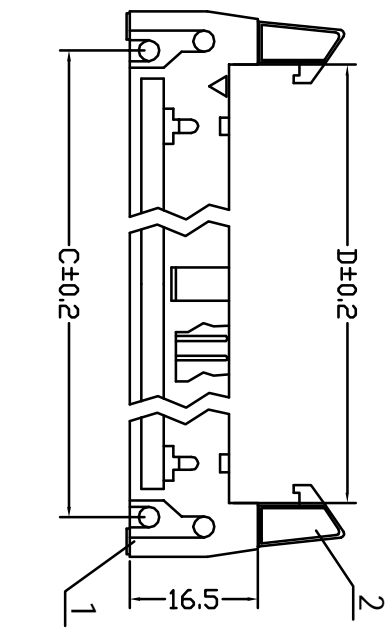

Specifications:
 Contact Resistance: 30mΩ max. at DC 100 mA
 Insulator Resistance: 1000MΩ min. at DC 500V
 Current Rating: 1AMP
 Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature: -55 ° C--+105 ° C
 Contact: Brass
 Housing: PBT 830% Glass Fiber (UL 94V-0)

Position	A	B	C	D
10	32.00	10.16	21.84	17.96
12	34.54	12.70	24.38	20.50
14	37.08	15.24	26.92	23.04
16	39.62	17.78	29.46	25.58
20	44.70	22.86	34.54	30.66
26	52.32	30.48	42.16	38.28
30	57.40	35.56	47.24	43.36
34	62.48	40.64	52.32	48.44
40	70.10	48.26	59.94	56.60
50	82.80	60.96	72.64	68.76
60	95.50	73.66	85.34	81.46
64	100.58	78.74	90.42	86.54

①	弯针触角长度由3.5mm改为4.0mm	签名/Signature	12.3.31
	更改记录/Revision note		日期/Date

设计/Designed by: 绘图/Drawn by: 审核/Checked by: 批准/Approved by:

新亚电子
XINYA ELECTRONIC CO., LTD

图名/Title: 119-XXGRK
 文件编号/File No.:
 页序/Sheet:

备注/Remark: 单位/Units: mm

公差/General Tolerance:
 X: ±0.2
 X: ±0.1
 .XX: ±0.05
 .XXX: ±0.01