



Specifications:  
 Contact Resistance: 30mΩ max at dc 100 mA  
 Insulator Resistance: 1000MΩ min. at DC 500V  
 Current Rating: 5A/MIP  
 Dielectric Withstanding Voltage: AC 1000V For 1 minute  
 Operating Temperature: -55°C--+105°C  
 Contact: Brass  
 Housing: PBT &30% Glass Fiber (UL 94V-0)

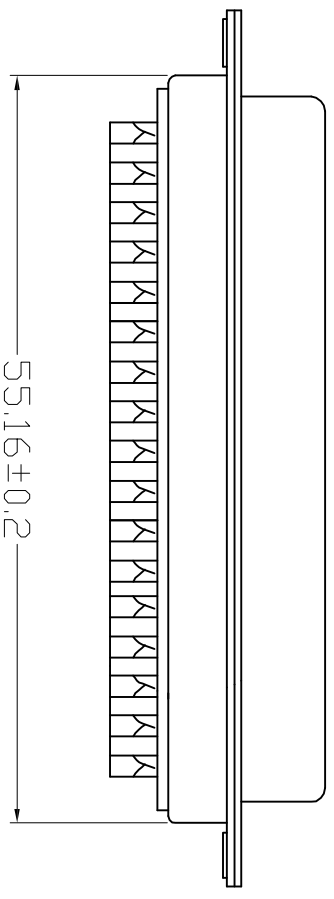

- 要求
1. 铁壳无明显起皮、杂色、生锈，断面毛边不超过0.05mm。
  2. 端子无松动感，且整排端子成一直线，端子之间相互平行，塑件无明显错位。
  3. 铆合要紧密，铁壳接合处无明显缝隙，且铆合处平滑。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	备注/Remarks
<p>图名/Title</p> <p>100F-50P产品图</p>				
文件编号/File No.		页序/Sheet		
.x .x		.xx .xx		
.xxx .xxx		.xx .xx		
<p>公差/General Tolerance</p> <p>±0.2 ±0.1 ±0.05 ±0.01</p>				单位/Units: MMT
序号/RevNo	更改记录/Revision note	签名/Signature	日期/Date	