

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Copper alloy
 Insulation Material: Polyester UL94V-0 PBT
 All materials must be GP materials

Ordering Information

G PHA204 - XX XX A 01 X

No. of Pins per Row
 03-32
 Contact Plating
 01=Tin
 02=Gold Flash Standard
 Duplex plating
 05=Gold flash/Tin
 COLOR
 A=BLACK
 B=GRAY
 ...

Recommended P.C.Board
 Hole Layout

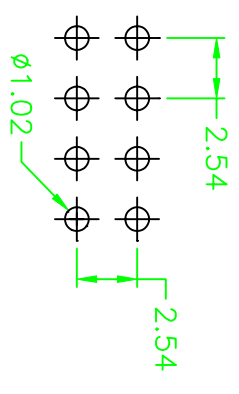

格 稜 股 份 有 限 公 司
Greenconn Corporation

REV.	01	UNIT	mm	SCALE	3=1		GENERAL TOLERANCE	DRAWN	C-T-Kang	DATE	10-18-97	DWG. NO.	G PHA204-A01	TITLE	2.54 BOX HEADER DUAL ROWS DIP TYPE BASE 9.10H
							X. ± 5°	CHECK		DATE		PART NO.	G PHA204-XX XX A 01 X		
							X. ± 2°	APPROVE		DATE					
							XX. ± 1°								
							XXX. ± 0.5°								