


◆ SPECIFICATION

DESCRIPTION

UL2896 - 10N × 110mm * 1.0p * (5/5 , 10/10) * (0,1*0,65) * P7

► CABLE TYPE (PATTERN : 7)

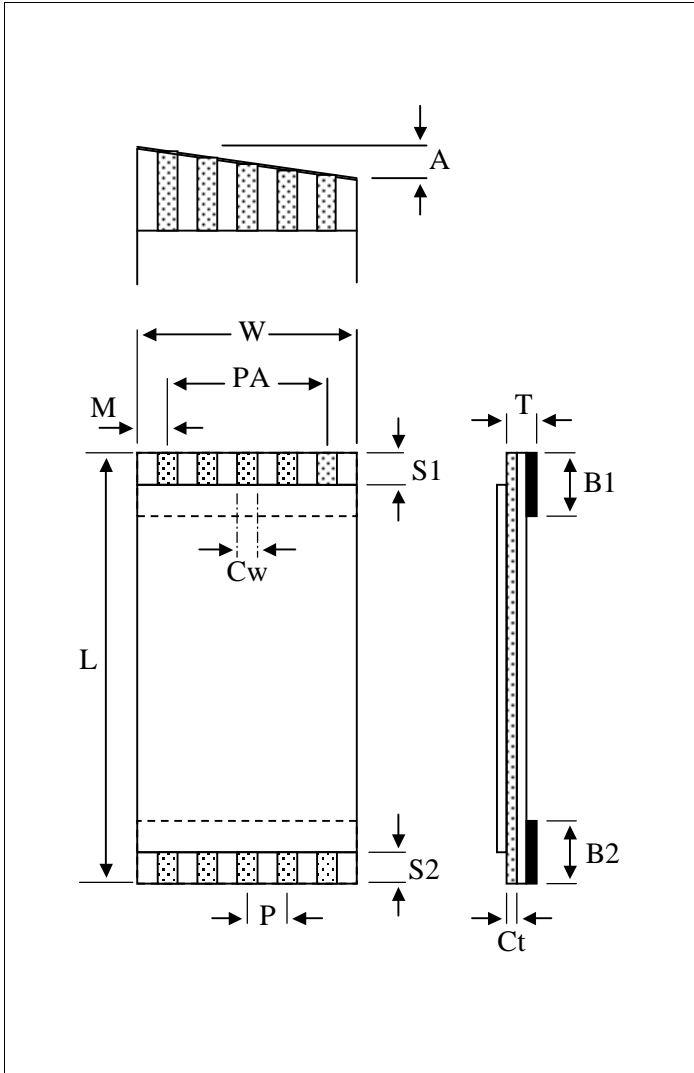

► CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	1.0	± 0.10
NO. OF CONDUCTOR	N	10	-
CABLE LENGTH	L	110	± 3.00
STRIP LENGTH	S1	5	± 1.0
	S2	5	± 1.0
S/T LENGTH	B1	10	± 2.0
	B2	10	± 2.0
INSERT THICK	T	0,3	± 0.05
WIDTH	W	11.00	± 0.15
SPAN	PA	9.00	± 0.15
MARGIN	M	1.0	± 0.15
CONDUCTOR THICK	Ct	0,10	± 0.01
CONDUCTOR WIDTH	Cw	0,65	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	1 μ m \uparrow	

◎ REMARK