

## DETAILS


|                        |                  |
|------------------------|------------------|
| <b>Product Number</b>  | FA10698_LN2-REC  |
| <b>Family</b>          | Leila            |
| <b>Type</b>            | Assembly         |
| <b>Color</b>           | black            |
| <b>Diameter</b>        | 21,6 mm          |
| <b>Height</b>          | 13,3 mm          |
| <b>Style</b>           | round            |
| <b>Optic Material</b>  |                  |
| <b>Holder Material</b> |                  |
| <b>Fastening</b>       | tape             |
| <b>Status</b>          | production ready |
| <b>ROHS Compliant</b>  | Yes              |
| <b>Date Updated</b>    | 27/06/2012       |




## OPTICAL PROPERTIES

| LED          | Viewing Angle | Light Beam | Efficiency | cd/lm | Connector |
|--------------|---------------|------------|------------|-------|-----------|
| MX-6         | 37+26 deg     | REC-class  | 84 %       | -     | -         |
| NS6x83       | sim: 37+26    | REC-class  | -          | -     | -         |
| OLP-x5050F6L | 38 deg        | REC-class  | 86 %       | 2.400 | -         |

Luminaire: Ledil Oy FA10698\_LN2-REC (Optogan 80lm @ 250mA) Efficiency=86%  
Lamps: 1 x Optogan 80lm @ 250mA

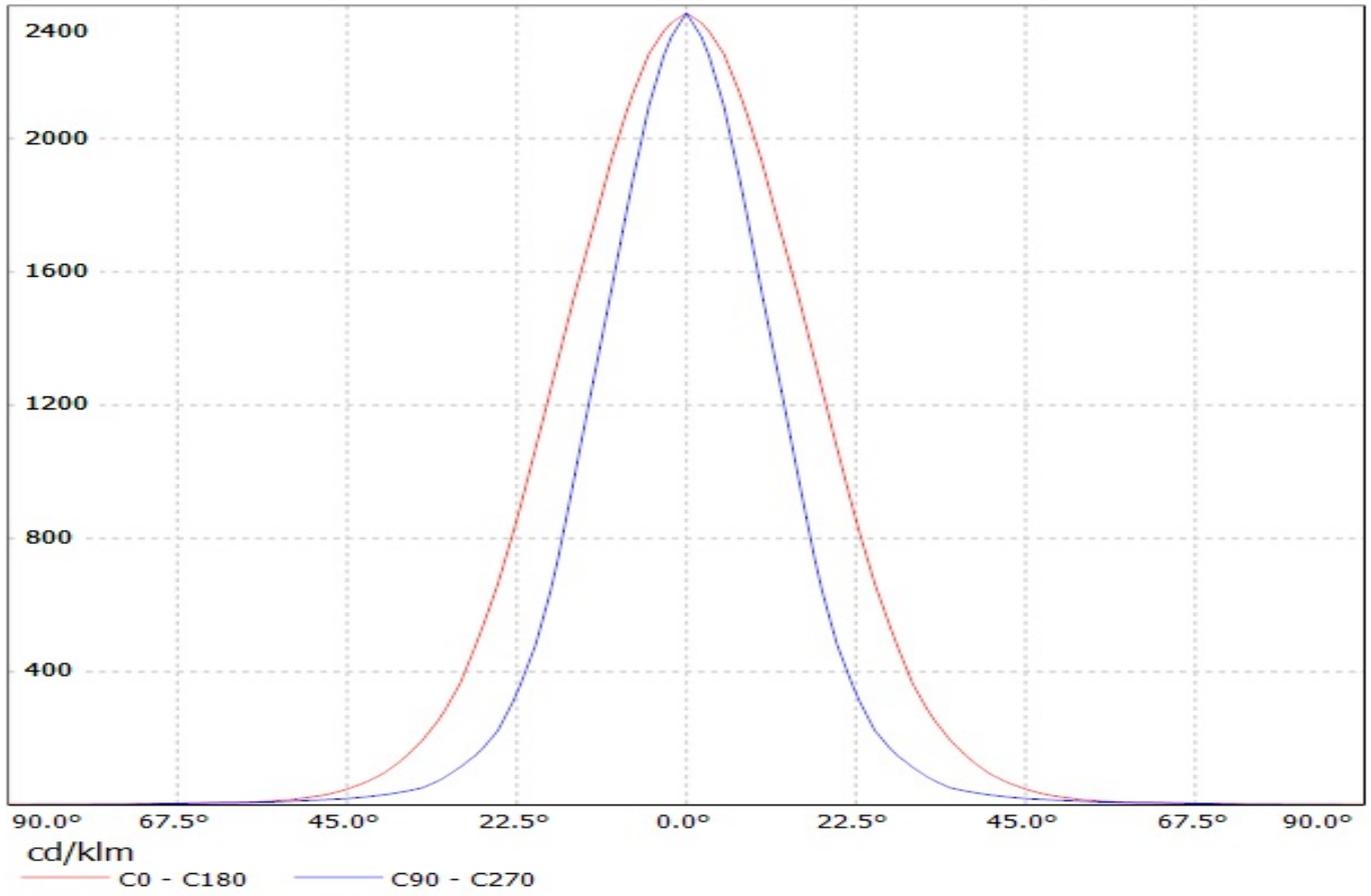

Luminaire: Ledil Oy FA10698\_LN2-REC (Optogan 80lm @ 250mA) Efficiency=86%  
Lamps: 1 x Optogan 80lm @ 250mA

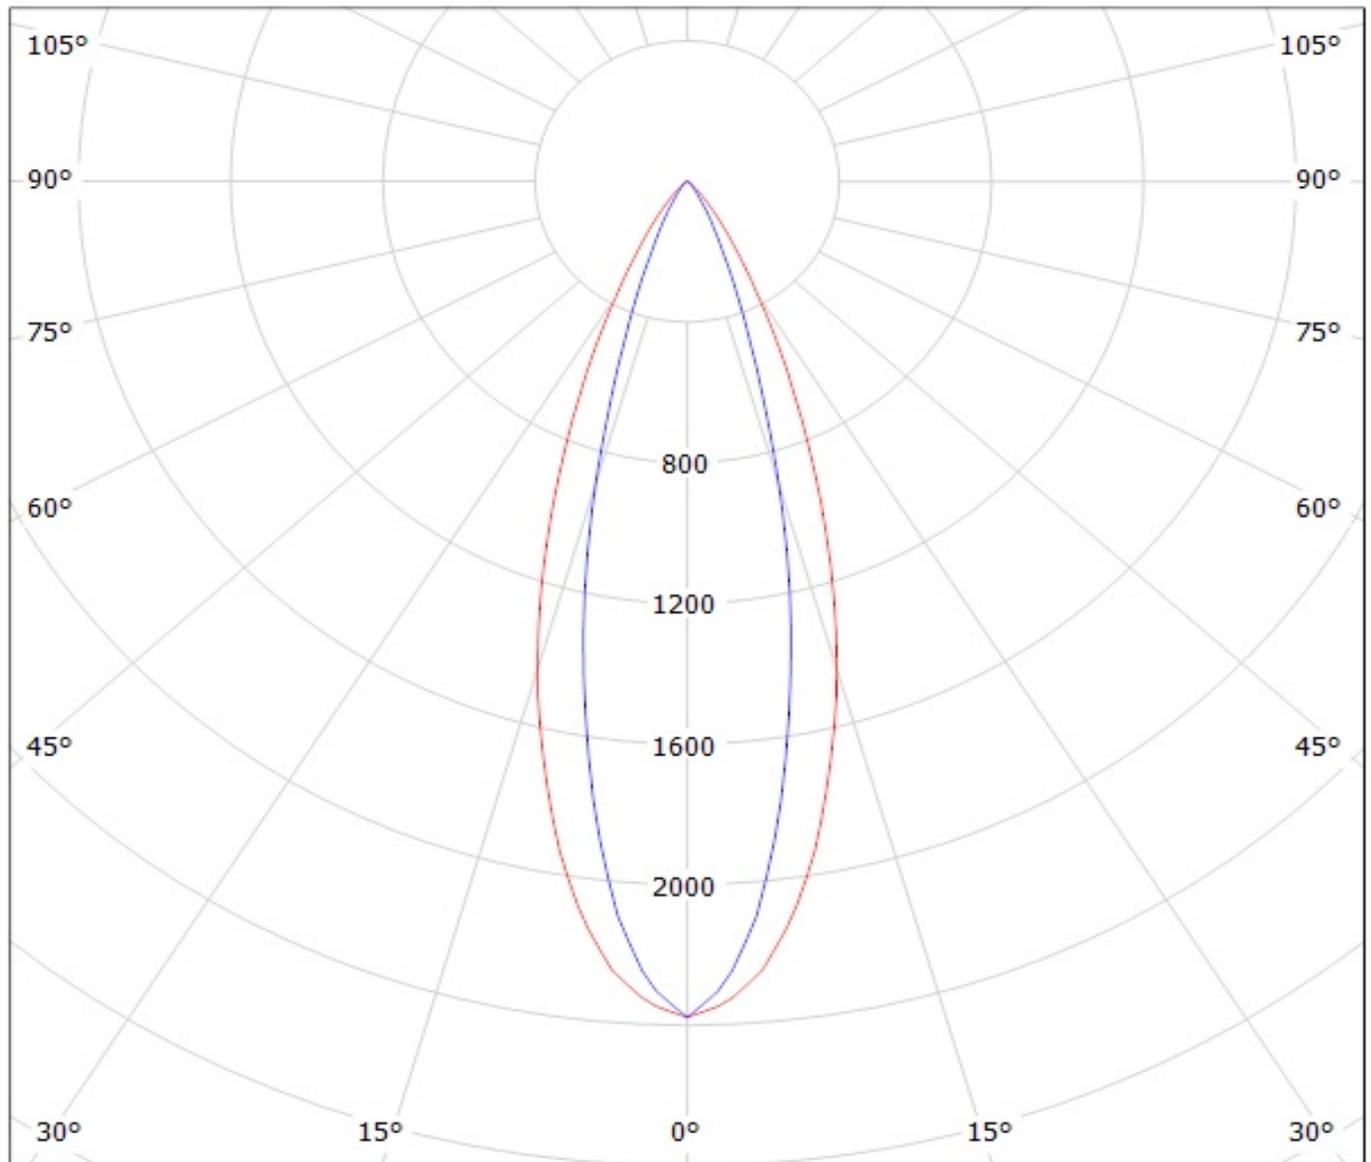

cd/klm

— C0 - C180    — C90 - C270

**NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.**