



12.5×7.3×9.5

JRC-23F

IC  **US E158859**

Features

- Low coil power consumption.
- High sensitivity.
- Small size, light weight.
- PC board mounting.
- Suitable for automation facilities, telecommunication equipment, wireless radio remote control, sound control toys application etc.

Ordering Information

JRC-23F H S 1 DC12V
 1 2 3 4 5

- | | |
|---|---|
| 1 Part number: JRC-23F | 3 Enclosure: S: Sealed type; NIL: Dust cover |
| 2 Coil power consumption: NIL:0.2W; H:0.15W | 4 Contact rating: 0.5:0.5A/125VAC; 1:1A/24VDC |
| | 5 Coil rated voltage(V): DC:1.5,3,5,6,9,12,24 |

Contact Data

Contact Arrangement	1C (SPDT(B-M))		
Contact Material	Ag (Au clad) AgNi (Au clad)		
Contact Rating (resistive)	0.5A/125VAC, 1A/24VDC		
Max. Switching Power	30W 62.5VA		
Max. Switching Voltage	60VDC 125VAC	Max. Switching Current: 1A	
Contact Resistance or Voltage drop	≤100mΩ	item 3.12 of IEC255-7	
Operational life	Electrical	10 ⁵	item 3.30 of IEC255-7
	Mechanical	5×10 ⁶	item 3.31 of IEC255-7

Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pickup voltage VDC(max) (80%of rated voltage)	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
001-150	1.5	3.0	15.0	1.2	0.15	0.15	≤5	≤5
003-150	3	6.0	60.0	2.4	0.30			
005-150	5	10.0	166.7	4.0	0.50			
006-150	6	12.0	240.0	4.8	0.60			
009-150	9	18.0	540.0	7.2	0.90			
012-150	12	24.0	960.0	9.6	1.20			
024-150	24	48.0	3840.0	19.2	2.40			
001-200	1.5	2.25	11.3	1.2	0.15	0.2	≤5	≤5
003-200	3	4.5	45.0	2.4	0.30			
005-200	5	7.5	125.0	4.0	0.50			
006-200	6	9.0	180.0	4.8	0.60			
009-200	9	13.5	405.0	7.2	0.90			
012-200	12	18.0	720.0	9.6	1.20			
024-200	24	36.0	2880.0	19.2	2.40			

- CAUTION:**
- 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
 - 2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.
 - 3.Unless otherwise stated, the rated coil voltage specified in coil parameter table shall be used for all tests and its application to the relay.

Operation condition

Insulation Resistance	1000M Ω min (at 250V 500V)	Item 7 of IEC255-5
Dielectric Strength		
Between contacts	50Hz 400V	Item 6 of IEC255-5
Between contact and coil	50Hz 1000V	Item 6 of IEC255-5
Shock resistance	100m/s ² 11ms	IEC68-2-27 Test Ea
Vibration resistance	10~55Hz double amplitude 3.3mm	IEC68-2-6 Test Fc
Terminals strength	5N	IEC68-2-21 Test Ua1
Solderability	235 $^{\circ}$ C \pm 2 $^{\circ}$ C 3 \pm 0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-30~70 $^{\circ}$ C	
Relative Humidity	35%~85% (at 40 $^{\circ}$ C)	IEC68-2-3Test Ca
Mass	2.2 g	

Qualification inspection:


Perform the qualification test as specified in the table IV of IEC255-19-1 and minimum sample size 24.

Safety approvals


Safety approval	UL&CUR
Load	1A/30VDC 0.5A/125VAC

Dimensions


mm/inch

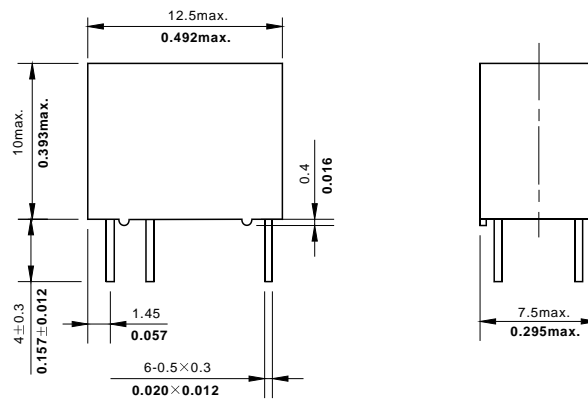

Dimensions



Mounting (Bottom view)



Wiring diagram (Bottom view)

NOTES 1).Dimensions are in millimeters.

2).Inch equivalents are given for general information only.