
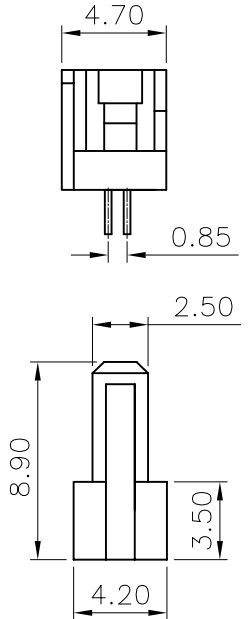
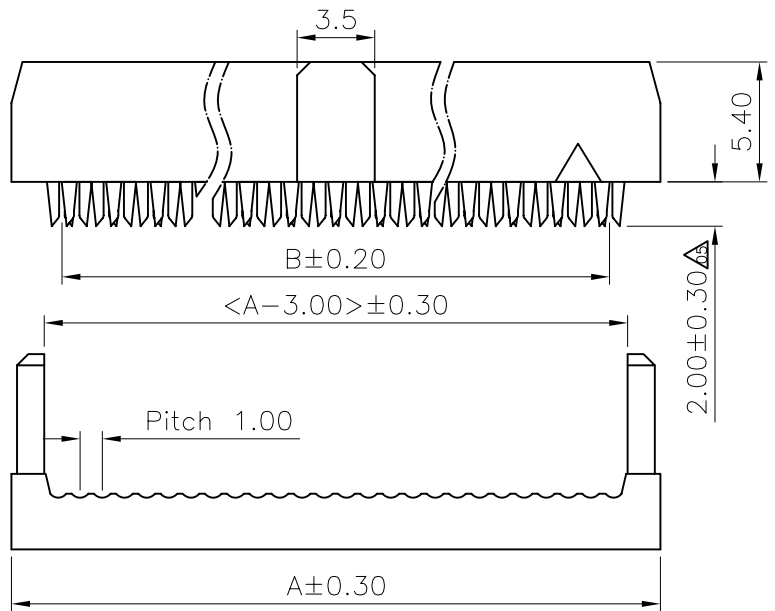


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
03	△	變更料號	2009.03.03	李彬彬
04	△	變更電鍍碼與供應商提供的產品電鍍碼一至和變更新的圖號	2011.02.25	伍文聰
05	△	依實際情況修改公差	2013.07.15	張佳黛

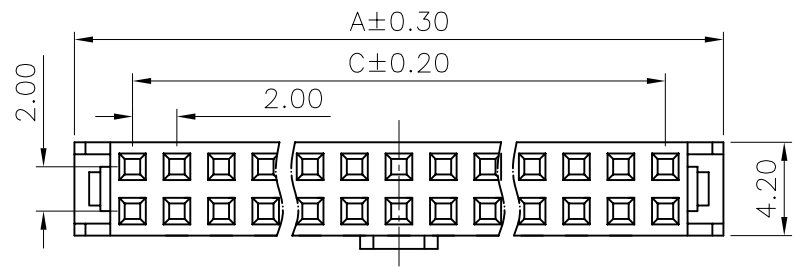

Specifications
 Current Rating: 0.5Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 125V AC
 Contact Resistance: 25mΩ Max.
 Operating Temperature: -40°C to +105°C
 BURRS NOT TO EXCEED 0.15mm.

Materials
 Contact Material: Phosphor Bronze or Brass.
 Contact Plated : Gold or Tin over Nickel.
 Insulation Material: Thermoplastic, UL 94V-0
 PBT or the equivalent material
 All materials must meet Greenconn requirement for environment protection

No. of PIN/ROW	Dimension Information		
	A	B	C
03	11.20	5.00	4.00
04	13.20	7.00	6.00
05	15.20	9.00	8.00
06	17.20	11.00	10.00
07	19.20	13.00	12.00
08	21.20	15.00	14.00
09	23.20	17.00	16.00
10	25.20	19.00	18.00
11	27.20	21.00	20.00
12	29.20	23.00	22.00
13	31.20	25.00	24.00
15	35.20	29.00	28.00
16	37.20	31.00	30.00
17	39.20	33.00	32.00
18	41.20	35.00	34.00
19	43.20	36.00	37.00
20	45.20	39.00	38.00
22	49.20	43.00	42.00
25	55.20	49.00	48.00
30	65.20	59.00	58.00
31	67.20	61.00	60.00
32	69.20	63.00	62.00
34	73.20	67.00	66.00
40	85.20	79.00	78.00

Ordering Information

△ CKFA216 - XX XX A 003 A 1 A X △ -23

No. of Pins per Row
 03, 04, 05, 06, 07, 08, 09
 10, 11, 12, 13, 15, 16, 17
 18, 19, 20, 22, 25, 30, 31
 32, 34, 40

Standard Plating
 70=plating 1u"
 Gold, over
 50u" ~100u" Nickel

Color
 1=Black

Standard Packing
 A=Box
 Selective Packing
 C=Tube

格稜股份有限公司
 Greenconn Corporation

GENERAL TOLERANCE	
X.* ± 5.0*	X. ± 0.35
.X* ± 3.0*	.X ± 0.30
.XX* ± 2.0*	.XX ± 0.25
.XXX* ± 1.0*	.XXX ± 0.10

DESIGN: 張佳黛
 DATE: 2013.07.15

CHECKED: 朱振霆
 DATE: 2013.07.15

DWG. NO. △ CKFA216-CA3AA

PART NO. △ △ CKFA216 - XX XXA003A1AX-23

TITLE: 2.00 IDC SOCKET

REV.	UNIT.	SCALE.	PAGE.
05	mm	1:1	1/1